



CERTIFICATE OF EXPRESS MAILING

I hereby certify that this document is being deposited with the U.S. Postal Service as Express Mail, Express Mail Certificate No. EL085170878US in an envelope addressed to the Assistant Commissioner for Patents, Washington, DC 20231, on this 7th day of November, 2001.

Print or type signature Bonnie Hardin-Mitchell

Signed Bonnie Hardin-Mitchell

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Sanders, et al.

Serial No. 09/966,551

Filed: September 26, 2001

For: **LOW SONIC BOOM INLET FOR
SUPERSONIC AIRCRAFT**

: Customer Service Center
: Initial Patent Examination Division
: (703) 308-1202
:
: Confirmation No. 5266
:
: Attorney's Docket 26272/04003

Honorable Commissioner of
Patents and Trademarks
Washington, DC 20231

**PETITION FOR GRANT OF FILING DATE
PURSUANT TO 37 CFR §1.182**

Sir:

In response to the Notice of Incomplete Nonprovisional Application dated October 26, 2001 (copy enclosed), which alleged that this application was filed without at least one claim, Applicants hereby petition for the grant of a filing date of September 26, 2001 for this application.

On September 26, 2000 the undersigned attorney, James A. Rich, filed a provisional patent application entitled LOW SONIC BOOM SUPERSONIC INLET FOR SUPERSONIC AIRCRAFT on behalf of Bobby W. Sanders and Lois J. Weir. This application received Serial No. 60/235,359. On September 26, 2001, after normal office hours, the undersigned attorney


03/08/2002 AKELLEY 00000001 030172 09966551
01 FC:122 130.00 CH
{PETITI.DOC;3}

personally completed and filed a nonprovisional application claiming priority from the aforesaid provisional application. A true and accurate copy of this application (the "Application") is enclosed. The Application contains 18 pages of specification, 2 pages of claims and 1 page of abstract. (The pages of claims and abstract are not numbered.) With the 14 pages of drawings, the Application papers comprise 35 pages of specification, claims, abstract and drawings. The attached copy of our return receipt postcard (page 1 of the attached copy of the Application) indicates that the Application, with drawings, had 36 pages. The undersigned attorney amended the card by hand to indicate the Application had 36 pages (22 pages of specification, claims and abstract, as stated in the Utility Patent Application Transmittal Form, prepared earlier in the day by the attorney's administrative assistant, plus 14 drawing pages) while assembling the papers for submission to the Patent Office on the evening of September 26th. The card demonstrates that the Application, as submitted on September 26th, contained at least 21 pages of specification, claims and abstract, together with 14 pages of drawings. The specification, without claims, is 18 pages long, and the abstract was 1 page long. Since we submitted at least 21 pages of specification, claims and abstract, there must have been at least 2 pages of claims, as in the duplicate Application submitted herewith. Thus, it is respectfully submitted that the Application is entitled to a filing date of September 26, 2001, and allowance of this Petition is respectfully requested.

The Commissioner is hereby authorized to charge the petition fee of \$130.00 specified in 37 CFR 1.17(h), and any other fees that may be required for this submission to Deposit Account 03-172. However, since no defect is believed to exist, a refund of the aforesaid \$130.00 fee, and any other overpayment hereunder to Deposit Account 03-172 is respectfully requested.

Respectfully submitted,

Dated: 11/7/01

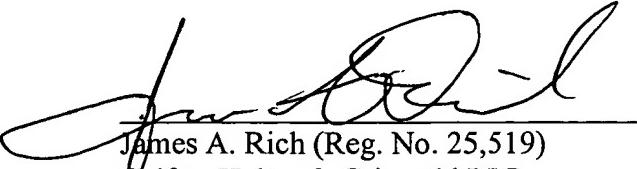
James A. Rich (Reg. No. 25,519)
Calfee, Halter & Griswold LLP
800 Superior Avenue, Suite 1400
Cleveland, Ohio 44114-2688
(216) 622-8636



Deposited with the United States Postal Service with sufficient postage via Express Mail; Mailing Label No. EL08464715US; addressed to the Assistant Commissioner for Patents, Box PATENT APPLICATION, Washington, DC 20231, this 26th day of September, 2001, with a certificate of mailing.

Re Utility Patent Application: Saunders, et al (Techland Research, Inc.)
For: LOW SONIC BOOM INLET FOR SUPERSONIC AIRCRAFT

CHG Ref.: 26272/04003

Please acknowledge receipt of:

- Utility Patent Application Transmittal (2 pgs. in duplicate)
- Fee Transmittal Sheet (1 pg) - Application Data Sheet (1 pg)
- Declaration and Power of Attorney (3 pgs)
- Utility Patent Application and Drawings (22 pgs)
- Return receipt postcard

JAR/jef

36

{JF1039.DOC;4}

file

EL084647715US



ORIGIN (POSTAL USE ONLY)		DESTINATION	
ZIP Code <i>44114</i>	Day of Delivery <input type="checkbox"/> Next <input checked="" type="checkbox"/> Second	Flat Rate Envelope <input type="checkbox"/>	
Date In <i>11/01</i>	Postage <input type="checkbox"/> 12 Noon <input checked="" type="checkbox"/> 3 PM <i>\$ 16.25</i>		
Mo. Day Year <i>11 01 01</i>	Military <input type="checkbox"/> 2nd Day <input type="checkbox"/> 3rd Day	Return Receipt Fee	
AM PM <i>AM</i>	Int'l Alpha Country Code	COD Fee	Insurance Fee
Ibs. <i>.11</i>	Acceptance Clerk Initials <i>JJ</i>	Total Postage & Fees <i>\$ 16.25</i>	
DELIVERY <input type="checkbox"/> Weekend <input type="checkbox"/> Holiday			



POST OFFICE TO ADDRESSEE

Customer Copy
Label 11-F July 1997

SEE REVERSE SIDE FOR
SERVICE GUARANTEE AND LIMITS
ON INSURANCE COVERAGE

METHOD OF PAYMENT: First Mail Corporate Acct. No. <i>Y46412215</i>		<input type="checkbox"/> WAIVER OF SIGNATURE (Domestic Only): Additional merchandise insurance is void if waiver of signature is requested. I wish delivery to be made without obtaining signature of addressee or addressee's agent (if delivery employee judges that article can be left in secure location) and I authorize that delivery employee's signature constitutes valid proof of delivery.	
General Agency Acct. No. or Service Acct. No.		<input type="checkbox"/> NO DELIVERY <input type="checkbox"/> Weekend <input type="checkbox"/> Holiday Customer Signature	
FROM: (PLEASE PRINT) <i>Techland, ALTICO & PARTNERS LLP</i>		TO: (PLEASE PRINT) <i>Assistant Commissioner for Patents</i>	
		PHONE <i>(44114-2601)</i>	
1575 CLAYTON INVESTMENT CENTER 1575 CLAYTON AVE CLEVELAND 26272/04003 JAR/JEF		1575 CLAYTON INVESTMENT CENTER 1575 CLAYTON AVE CLEVELAND 26272/04003 JAR/JEF	
TECHLAND		TECHLAND	
PRESS HARD. You are making 3 copies.		FOR PICKUP OR TRACKING CALL 1-800-222-1811 www.usps.gov	



CALFEE, HALTER & GRISWOLD LLP
1400 McDonald Investment Center
800 Superior Avenue
Cleveland, Ohio 44114-2688

01-07-02

Page 1 of 2

03C0



UNITED STATES PATENT AND TRADEMARK OFFICE

COMMISSIONER FOR PATENTS
UNITED STATES PATENT AND TRADEMARK OFFICE
WASHINGTON, D.C. 20231
www.uspto.gov



APPLICATION NUMBER	FILING/RECEIPT DATE			FIRST NAMED APPLICANT		ATTORNEY DOCKET NUMBER
09/966,551	09/26/2001	Case	Sub	Bobby W. Sanders		26272/04003
		Number	Ctry	Case	Action Due	Due Date
		2627204003	US		MISSING PARTS	CONFIRMATION NO. 5266
		Action US-MISSING PART			1 MON EXTENSION	26-Dec-2001
					2 MON EXTENSION	26-Jan-2002
					FINAL MSNG PRYS	060000000697871802
					GOOD CAUSE ONLY	26-Mar-2002
FORMALITIES LETTER						

CALFEE HALTER & GRISWOLD, LLP
800 SUPERIOR AVENUE
SUITE 1400
CLEVELAND, OH 44114

Date Mailed: 10/26/2001

Verified: _____

NOTICE OF INCOMPLETE NONPROVISIONAL APPLICATION

FILED UNDER 37 CFR 1.53(b)

A filing date has NOT been accorded to the above-identified application papers for the reason(s) indicated below.

All of the items noted below and a newly executed oath or declaration covering the items must be submitted within TWO MONTHS of the date of this Notice, unless otherwise indicated, or proceedings on the application will be terminated (37 CFR 1.53(e)).

The filing date will be the date of receipt of all items required below, unless otherwise indicated. Any assertions that the item(s) required below were submitted, or are not necessary for a filing date, must be by way of petition directed to the attention of the Office of Petitions accompanied by the \$130.00 petition fee (37 CFR 1.17(h)). If the petition states that the application is entitled to a filing date, a request for a refund of the petition fee may be included in the petition.

- The specification does not include at least one claim.

The required items noted below SHOULD be filed along with any items required above. The filing date of this nonprovisional application will be the date of receipt of the items required above.

- The oath or declaration is unsigned.

The application is informal since it does not comply with the regulations for the reason(s) indicated below.

The required item(s) identified below must be timely submitted to avoid abandonment:

- Substitute drawings in compliance with 37 CFR 1.84 because:

- drawing sheets do not have the appropriate margin(s) (see 37 CFR 1.84(g)). Each sheet must include a top margin of at least 2.5 cm. (1 inch), a left side margin of at least 2.5 cm. (1 inch), a right side margin of at least 1.5 cm. (5/8 inch), and a bottom margin of at least 1.0 cm. (3/8 inch);
- Drawings must be reasonably free from erasures and must be free from alterations, overwritings, interlineations, folds, and copy marks.

OCT 30 2001

T.L.B. IP. Dept.

RECEIVED

OCT 29 2001

The following item(s) appear to have been omitted from the application:

- Page(s) 20, 21 and 22 of the specification (description and claims).

I. Should applicant contend that the above-noted omitted item(s) was in fact deposited in the U.S. Patent and Trademark Office (USPTO) with the nonprovisional application papers, a copy of this Notice and a petition (and \$130.00 petition fee (37 CFR 1.17(h))) with evidence of such deposit **must be filed within TWO MONTHS** of the date of this Notice. The petition fee will be refunded if it is determined that the item(s) was received by the USPTO.

II. Should applicant desire to supply the omitted item(s) and accept the date that such omitted item(s) was filed in the USPTO as the filing date of the above-identified application, a copy of this Notice, the omitted item(s) (with a supplemental oath or declaration in compliance with 37 CFR 1.63 and 1.64 referring to such items), and a petition under 37 CFR 1.182 (with the \$130.00 petition fee (37 CFR 1.17(h))) requesting the later filing date **must be filed within TWO MONTHS** of the date of this Notice.

III. The failure to file a petition (and petition fee) under the above options (I) or (II) within **TWO MONTHS** of the date of this Notice (37 CFR 1.181(f)) will be treated as a constructive acceptance by the applicant of the application as deposited in the USPTO. **THIS TWO MONTH PERIOD IS NOT EXTENDABLE UNDER 37 CFR 1.136(a) or (b)**. In the absence of a timely filed petition in reply to this Notice, the application will maintain a filing date as of the date of deposit of the application papers in the USPTO, and original application papers (*i.e.*, the original disclosure of the invention) will include only those application papers present in the USPTO on the date of deposit.

In the event that applicant elects not to take action pursuant to options (I) or (II) above (thereby constructively electing option (III)), amendment of the specification to renumber the pages consecutively and cancel incomplete sentences caused by any omitted page(s), and/or amendment of the specification to cancel all references to any omitted drawing(s), relabel the drawing figures to be numbered consecutively (if necessary), and correct the references in the specification to the drawing figures to correspond with any relabelled drawing figures, is required. Any drawing changes should be accompanied by a copy of the drawing figures showing the proposed changes in red ink. Such amendment and/or correction to the drawing figures, if necessary, should be by way of preliminary amendment submitted prior to the first Office action to avoid delays in the prosecution of the application.

*A copy of this notice **MUST** be returned with the reply.*

Customer Service Center

Initial Patent Examination Division (703) 308-1202

PART 1 - ATTORNEY/APPLICANT COPY



CERTIFICATE OF EXPRESS MAILING

I hereby certify that this document is being deposited with the U.S. Postal Service as Express Mail, Express Mail Certificate No. EL085170878US in an envelope addressed to the Assistant Commissioner for Patents, Washington, DC 20231, on this 7th day of November, 2001.

Print or type signature Bonnie Hardin-Mitchell

Signed Bonnie Hardin-Mitchell

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Sanders, et al.

Serial No. 09/966,551

Filed: September 26, 2001

For: **LOW SONIC BOOM INLET FOR
SUPERSONIC AIRCRAFT**

: Customer Service Center
: Initial Patent Examination Division
: (703) 308-1202
: Confirmation No. 5266
: Attorney's Docket 26272/04003

Honorable Commissioner of
Patents and Trademarks
Washington, DC 20231

**PETITION FOR GRANT OF FILING DATE
PURSUANT TO 37 CFR §1.182**

Sir:

In response to the Notice of Incomplete Nonprovisional Application dated October 26, 2001 (copy enclosed), which alleged that this application was filed without at least one claim, Applicants hereby petition for the grant of a filing date of September 26, 2001 for this application.


On September 26, 2000 the undersigned attorney, James A. Rich, filed a provisional patent application entitled LOW SONIC BOOM SUPERSONIC INLET FOR SUPERSONIC AIRCRAFT on behalf of Bobby W. Sanders and Lois J. Weir. This application received Serial No. 60/235,359. On September 26, 2001, after normal office hours, the undersigned attorney

personally completed and filed a nonprovisional application claiming priority from the aforesaid provisional application. A true and accurate copy of this application (the "Application") is enclosed. The Application contains 18 pages of specification, 2 pages of claims and 1 page of abstract. (The pages of claims and abstract are not numbered.) With the 14 pages of drawings, the Application papers comprise 35 pages of specification, claims, abstract and drawings. The attached copy of our return receipt postcard (page 1 of the attached copy of the Application) indicates that the Application, with drawings, had 36 pages. The undersigned attorney amended the card by hand to indicate the Application had 36 pages (22 pages of specification, claims and abstract, as stated in the Utility Patent Application Transmittal Form, prepared earlier in the day by the attorney's administrative assistant, plus 14 drawing pages) while assembling the papers for submission to the Patent Office on the evening of September 26th. The card demonstrates that the Application, as submitted on September 26th, contained at least 21 pages of specification, claims and abstract, together with 14 pages of drawings. The specification, without claims, is 18 pages long, and the abstract was 1 page long. Since we submitted at least 21 pages of specification, claims and abstract, there must have been at least 2 pages of claims, as in the duplicate Application submitted herewith. Thus, it is respectfully submitted that the Application is entitled to a filing date of September 26, 2001, and allowance of this Petition is respectfully requested.

The Commissioner is hereby authorized to charge the petition fee of \$130.00 specified in 37 CFR 1.17(h), and any other fees that may be required for this submission to Deposit Account 03-172. However, since no defect is believed to exist, a refund of the aforesaid \$130.00 fee, and any other overpayment hereunder to Deposit Account 03-172 is respectfully requested.

Respectfully submitted,

Dated: 11/7/01

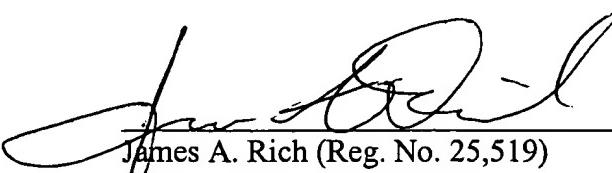

James A. Rich (Reg. No. 25,519)
Calfee, Halter & Griswold LLP
800 Superior Avenue, Suite 1400
Cleveland, Ohio 44114-2688
(216) 622-8636

Please type a plus sign (+) inside this box



**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

26272/04003

First Inventor

Bobby W. Sanders

Title

LOW SONIC BOOM INLET FOR SUPERSONIC AIRCRAFT

Express Mail Label No.

EL084647715US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents

- Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
- Applicant claims small entity status.
See 37 CFR 1.27.
- Specification [Total Pages 22]
 - Descriptive title of the invention
 - Cross Reference to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to sequence listing, a table, or a computer program listing appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (*if filed*)
 - Detailed Description
 - Claim(s)
 - Abstracts
- Drawing(s) (35 U. 113) [Total Pages 14]
- Oath or Declaration [Total Pages 3]
 - a. Not executed (original or copy)
 - b. Copy from a prior application (37 CFR 1.63 (d))
(for continuation/divisional with Box 18 completed)
 - i. **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b)
- Application Data Sheet. See 37 CFR 1.76

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

7. CD-ROM or CD-R in duplicate, large table or Computer Program (*Appendix*)
8. Nucleotide and/or Amino Acid Sequence Submission (*if applicable, all necessary*)
 - a. Computer Readable Form (CRF)
 - b. Specification Sequence Listing on:
 - i. CD-ROM or CD-R (2 copies); or
 - ii. paper
 - c. Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. Assignment Papers (cover sheet & document(s))
10. 37 CFR 3.73(b) Statement Power of Attorney
11. English Translation Document (*if applicable*)
12. Information Disclosure Statement (IDS)/PTO-1449 Copies of IDS Citations
13. Preliminary Amendment
14. Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
15. Certified Copy of Priority Document(s) (*if foreign priority is claimed*)
16. Request and Certification under 35 U.S.C. 122 (b)(2)(B)(i).
Applicant must attach form PTO/SB/35 or its equivalent
17. Other: _____

..... *Verified Statement Claiming Small Entity to follow*

18. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:


 Continuation Divisional Continuation-in-part (CIP) of prior application No.: /

Prior application Information: Examiner Group Art Unit:

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

19. CORRESPONDENCE ADDRESS

<input checked="" type="checkbox"/> Customer Number or Bar Code Label				or	Correspondence address below	
Name:						
Address						
	City		State	Zip Code		
Country	Telephone	(216) 622-8636		Fax	(216) 241-0816	

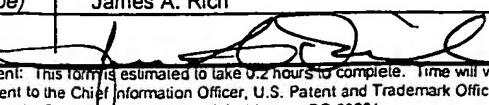Name (Print/Type)	James A. Rich	Registration No. (Attorney/Agent)	25,519
Signature			
Date	September 26, 2001		

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Please type a plus sign (+) inside this box +

PTO/SB/05 (4/98)

Approved for use through 09/30/2000. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Protection Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY
PATENT APPLICATION
TRANSMITTAL

Attorney Docket No.	26272/04003
First Inventor or Application Identifier	Bobby W. Sanders
Title	LOW SONIC BOOM INLET FOR SUPERSONIC AIRCRAFT
Express Mail Label No.	EL084647715US

CERTIFICATE OF EXPRESS MAILING


EXPRESS MAIL--Mailing Label No.: EL084647715US

Date of Deposit: September 26, 2001

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on this date indicated below and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

James A. Rice
PRINTED NAME OF PERSON SIGNING THIS CERTIFICATE

SIGNATURE OF

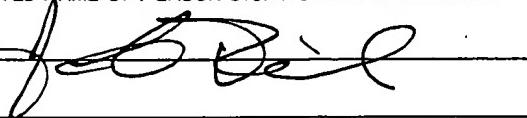

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL for FY 2001

Patent fees are subject to annual revision

TOTAL AMOUNT OF PAYMENT (\$355.00)

Complete if Known

Application Number	
Filing Date	September 26, 2001
First Named Inventor	Bobby W. Sanders
Examiner Name	
Group Art Unit	
Attorney Docket No.	26272/4003

METHOD OF PAYMENT				FEE CALCULATION (continued)																																																																																																																																																									
<p>1. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:</p> <p>Deposit Account Number 03-0172</p> <p>Deposit Account Name _____</p> <p><input checked="" type="checkbox"/> Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17</p> <p><input checked="" type="checkbox"/> Applicant claims small entity status See 37 CFR 1.27</p>				<p>3. ADDITIONAL FEES</p> <table border="1"> <thead> <tr> <th>Fee Code</th> <th>Large Entity Fee (\$)</th> <th>Small Entity Fee (\$)</th> <th>Fee Description</th> <th>Fee Paid</th> </tr> </thead> <tbody> <tr><td>105</td><td>130</td><td>205</td><td>Surcharge - late filing fee or oath</td><td></td></tr> <tr><td>127</td><td>50</td><td>227</td><td>Surcharge - late provisional filing fee or cover sheet</td><td></td></tr> <tr><td>139</td><td>130</td><td>139</td><td>Non-English specification</td><td></td></tr> <tr><td>147</td><td>2,520</td><td>147</td><td>For filing a request for <i>ex parte</i> reexamination</td><td></td></tr> <tr><td>112</td><td>920*</td><td>112</td><td>Requesting publication of SIR prior to Examiner action</td><td></td></tr> <tr><td>113</td><td>1,840*</td><td>113</td><td>Requesting publication of SIR after Examiner action</td><td></td></tr> <tr><td>115</td><td>110</td><td>215</td><td>Extension for reply within first month</td><td></td></tr> <tr><td>116</td><td>390</td><td>216</td><td>Extension for reply within second month</td><td></td></tr> <tr><td>117</td><td>890</td><td>217</td><td>Extension for reply within third month</td><td></td></tr> <tr><td>118</td><td>1,390</td><td>218</td><td>Extension for reply within fourth month</td><td></td></tr> <tr><td>128</td><td>1,890</td><td>228</td><td>Extension for reply within fifth month</td><td></td></tr> <tr><td>119</td><td>310</td><td>219</td><td>Notice of Appeal</td><td></td></tr> <tr><td>120</td><td>310</td><td>220</td><td>Filing a brief in support of an appeal</td><td></td></tr> <tr><td>121</td><td>270</td><td>221</td><td>Request for oral hearing</td><td></td></tr> <tr><td>138</td><td>1,510</td><td>138</td><td>Petition to institute a public use proceeding</td><td></td></tr> <tr><td>140</td><td>110</td><td>240</td><td>Petition to revive - unavoidable</td><td></td></tr> <tr><td>141</td><td>1,240</td><td>241</td><td>Petition to revive - unintentional</td><td></td></tr> <tr><td>142</td><td>1,240</td><td>242</td><td>Utility issue fee (or reissue)</td><td></td></tr> <tr><td>143</td><td>440</td><td>243</td><td>Design issue fee</td><td></td></tr> <tr><td>144</td><td>600</td><td>244</td><td>Plant issue fee</td><td></td></tr> <tr><td>122</td><td>130</td><td>122</td><td>Petitions to the Commissioner</td><td></td></tr> <tr><td>123</td><td>130</td><td>123</td><td>Petitions related to provisional applications</td><td></td></tr> <tr><td>126</td><td>180</td><td>126</td><td>Submission of Information Disclosure Stmt</td><td></td></tr> <tr><td>581</td><td>40</td><td>581</td><td>Recording each patent assignment per property (times number of properties)</td><td></td></tr> <tr><td>146</td><td>710</td><td>246</td><td>Filing a submission after final rejection (37 CFR § 1.129(a))</td><td></td></tr> <tr><td>149</td><td>710</td><td>249</td><td>For each additional invention to be examined (37 CFR § 1.129(b))</td><td></td></tr> <tr><td>179</td><td>710</td><td>279</td><td>Request for Continued Examination (RCE)</td><td></td></tr> <tr><td>169</td><td>900</td><td>169</td><td>Request for expedited examination of a design application</td><td></td></tr> <tr><td colspan="4">Other fee (specify) _____</td><td>SUBTOTAL (3) (\$)</td></tr> </tbody> </table>				Fee Code	Large Entity Fee (\$)	Small Entity Fee (\$)	Fee Description	Fee Paid	105	130	205	Surcharge - late filing fee or oath		127	50	227	Surcharge - late provisional filing fee or cover sheet		139	130	139	Non-English specification		147	2,520	147	For filing a request for <i>ex parte</i> reexamination		112	920*	112	Requesting publication of SIR prior to Examiner action		113	1,840*	113	Requesting publication of SIR after Examiner action		115	110	215	Extension for reply within first month		116	390	216	Extension for reply within second month		117	890	217	Extension for reply within third month		118	1,390	218	Extension for reply within fourth month		128	1,890	228	Extension for reply within fifth month		119	310	219	Notice of Appeal		120	310	220	Filing a brief in support of an appeal		121	270	221	Request for oral hearing		138	1,510	138	Petition to institute a public use proceeding		140	110	240	Petition to revive - unavoidable		141	1,240	241	Petition to revive - unintentional		142	1,240	242	Utility issue fee (or reissue)		143	440	243	Design issue fee		144	600	244	Plant issue fee		122	130	122	Petitions to the Commissioner		123	130	123	Petitions related to provisional applications		126	180	126	Submission of Information Disclosure Stmt		581	40	581	Recording each patent assignment per property (times number of properties)		146	710	246	Filing a submission after final rejection (37 CFR § 1.129(a))		149	710	249	For each additional invention to be examined (37 CFR § 1.129(b))		179	710	279	Request for Continued Examination (RCE)		169	900	169	Request for expedited examination of a design application		Other fee (specify) _____				SUBTOTAL (3) (\$)
Fee Code	Large Entity Fee (\$)	Small Entity Fee (\$)	Fee Description	Fee Paid																																																																																																																																																									
105	130	205	Surcharge - late filing fee or oath																																																																																																																																																										
127	50	227	Surcharge - late provisional filing fee or cover sheet																																																																																																																																																										
139	130	139	Non-English specification																																																																																																																																																										
147	2,520	147	For filing a request for <i>ex parte</i> reexamination																																																																																																																																																										
112	920*	112	Requesting publication of SIR prior to Examiner action																																																																																																																																																										
113	1,840*	113	Requesting publication of SIR after Examiner action																																																																																																																																																										
115	110	215	Extension for reply within first month																																																																																																																																																										
116	390	216	Extension for reply within second month																																																																																																																																																										
117	890	217	Extension for reply within third month																																																																																																																																																										
118	1,390	218	Extension for reply within fourth month																																																																																																																																																										
128	1,890	228	Extension for reply within fifth month																																																																																																																																																										
119	310	219	Notice of Appeal																																																																																																																																																										
120	310	220	Filing a brief in support of an appeal																																																																																																																																																										
121	270	221	Request for oral hearing																																																																																																																																																										
138	1,510	138	Petition to institute a public use proceeding																																																																																																																																																										
140	110	240	Petition to revive - unavoidable																																																																																																																																																										
141	1,240	241	Petition to revive - unintentional																																																																																																																																																										
142	1,240	242	Utility issue fee (or reissue)																																																																																																																																																										
143	440	243	Design issue fee																																																																																																																																																										
144	600	244	Plant issue fee																																																																																																																																																										
122	130	122	Petitions to the Commissioner																																																																																																																																																										
123	130	123	Petitions related to provisional applications																																																																																																																																																										
126	180	126	Submission of Information Disclosure Stmt																																																																																																																																																										
581	40	581	Recording each patent assignment per property (times number of properties)																																																																																																																																																										
146	710	246	Filing a submission after final rejection (37 CFR § 1.129(a))																																																																																																																																																										
149	710	249	For each additional invention to be examined (37 CFR § 1.129(b))																																																																																																																																																										
179	710	279	Request for Continued Examination (RCE)																																																																																																																																																										
169	900	169	Request for expedited examination of a design application																																																																																																																																																										
Other fee (specify) _____				SUBTOTAL (3) (\$)																																																																																																																																																									
** or number previously paid, if greater; For Reissue, see above				* Reduced by Basic Filing Fee Paid	SUBTOTAL (3) (\$)																																																																																																																																																								

SUBMITTED BY			Complete (if applicable)	
Name (Print/Type)	James A. Rich	Registration No. (Attorney/Agent)	25,519	Telephone (216) 622-8200
Signature				Date September 2, 2001

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

INVENTOR INFORMATION

Inventor One Given Name:: Bobby W
Family Name:: Sanders
Postal Address Line One:: 2806 Wakefield Lane
City:: Westlake
State or Province:: Ohio
Country:: USA
Postal or Zip Code:: 44145
Citizenship Country:: USA
Inventor Two Given Name:: Lois J
Family Name:: Weir
Postal Address Line One:: 1306 Lipton Avenue, S.W.
City:: North Canton
State or Province:: Ohio
Country:: USA
Postal or Zip Code:: 44720
Citizenship Country:: USA

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 24024
Fax One:: 216-241-0816

APPLICATION INFORMATION

Title Line One:: LOW SONIC BOOM INLET FOR SUPERSONIC AIRCRAFT
Title Line Two:: RSONIC AIRCRAFT
Total Drawing Sheets:: 14
Formal Drawings?:: No
Application Type:: Utility
Docket Number:: 26272/04003
Secrecy Order in Parent Appl.?:: No

Source:: PrintEFS Version 1.0.1

CALFEE, HALTER & GRISWOLD LLP

Docket No. 26272/04003

DECLARATION
AND POWER OF ATTORNEY

ORIGINAL APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

LOW SONIC BOOM INLET FOR SUPERSONIC AIRCRAFT

the specification of which

- is attached hereto,
 was filed on September 26, 2001.
 and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim the benefit of foreign priority under 35 USC 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Country	Application Number	Serial	Filing Date	Legal Status	Priority Claimed

I hereby claim the benefit of United States priority under 35 USC §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 USC 112, I acknowledge the duty to disclose information material to

the patentability of this application as defined in 37 CFR 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial Number	Filing Date	Legal Status

I hereby claim the benefit of United States priority under 35 USC §119(e) of any United States provisional application(s) listed below:

Application Serial Number	Filing Date	Legal Status
60/235,359	September 26, 2000	Pending

I hereby appoint the following attorney(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Charles B. Lyon Reg. No. 25,739	John T. Wiedemann Reg. No. 28,920
June E. Rickey Reg. No. 40,144	Leonard L. Lewis Reg. No. 31,176
Jeanne E. Longmuir Reg. No. 33,133	Sean T. Moorhead Reg. No. 38,564
Mary E. Golrick Reg. No. 34,829	James A. Rich Reg. No. 25,519
Tara A. Kastelic Reg. No. 35,980	Nenad Pejic Reg. No. 37,415
John E. Miller Reg. No. 26,206	Peter Kraguljac Reg. No. 38,520
Eileen T. Matthews Reg. No. 41,973	James A. Balazs Reg. No. 40,591
Pamela A. Docherty Reg. No. 47,401	

Address all correspondence and telephone calls to:

James A. Rich, Esq.
Calfee, Halter & Griswold LLP
800 Superior Ave., Suite 1400
Cleveland, Ohio 44114-2688
216-622-8200

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of
first inventor: Bobby W. Sanders

Inventor's
Signature _____

Date: _____

Residence &
Post Office Address
Citizenship 2806 Wakefield Lane
Westlake, Ohio 44145
U.S.A.

Full name of
second joint inventor: Lois J. Weir

Inventor's
Signature _____

Date: _____

Residence &
Post Office Address
Citizenship 1306 Lipton Avenue, S.W.
North Canton, Ohio 44720
U.S.A.

LOW SONIC BOOM INLET FOR SUPERSONIC AIRCRAFT

Field of the Invention

This invention relates to air intakes for flight vehicles and, more particularly, to air intakes for aircraft that are 5 designed to fly at supersonic speeds.

Background of the Invention

Inlets for propulsion systems for high speed supersonic aircraft are designed to efficiently decelerate the approaching high-speed airflow to velocities that are compatible with 10 efficient airbreathing engine operation and to provide optimum matching of inlet airflow supply to engine airflow requirements. Entrance airflow velocities to existing air-breathing engines must be subsonic; therefore, it is necessary to decelerate the airflow speed during supersonic flight. The airflow velocities 15 are slowed from supersonic speeds (above the speed of sound) to engine entrance Mach numbers that are subsonic (below the speed of sound).

In aircraft propulsion systems having supersonic inlets, it is essential that the inlet decelerate the airflow in a manner 20 that minimizes the pressure losses, cowl and additive drag, and flow distortion at the engine entrance. For supersonic inlets, efficient deceleration of the supersonic velocities is accomplished by a series of weak shock waves and/or isentropic compression, in which the speed is progressively slowed to an 25 inlet throat Mach number of about 1.30. A terminal shock wave located near the inlet throat slows the airflow from supersonic speeds (above the speed of sound) to subsonic speeds (below the speed of sound). This terminal shock wave typically changes a Mach 1.3 flow condition to a high subsonic flow level. 30 Downstream of the terminal shock, the speed of the airflow is

additionally slowed in the subsonic diffuser of the inlet by a smooth transitioning of the flow duct from a smaller throat area to the larger area at the engine entrance.

Mixed-compression inlets, in which some of the supersonic compression or deceleration in velocity is accomplished external to the duct and some of the compression is accomplished internally, have commonly been proposed for supersonic aircraft that cruise at Mach numbers higher than 2.0. Any inlet that accomplishes some of its compression internally is subject to an undesirable phenomenon known as inlet unstart. Inlet unstart is characterized by an expulsion of the inlet terminal shock from the desirable location at the inlet throat station to a position ahead of the inlet cowling with an associated large increase in drag and large thrust loss. Unstart may also affect the aerodynamics of the aircraft.

Sonic boom is another factor that must be taken into account in the design of inlets of supersonic aircraft. Since economically viable supersonic commercial aircraft must be able to operate supersonically over land, the inlet should contribute minimally to the sonic boom signature of the aircraft. Therefore, the technical challenge for the designer of inlets for modern commercial aircraft is to provide a high performance configuration that provides large operability margins (terminal shock stability to reduce the probability of inlet unstart), and to also identify a design that offers a reduction in the overall sonic boom signature of the aircraft. Mixed-compression inlets can efficiently decelerate the airflow while providing large operability margins. However, the external compression, which is provided by a centerbody or cowl surface, radiates shock waves outward that contribute to the aircraft's sonic boom signature. These designs also have leading edges that include

an external surface at an angle to the local airflow. Oblique shock waves are generated by these surfaces, contributing to the aircraft's overall sonic boom problem. Over-land operation of commercial supersonic aircraft requires that the sonic boom signature from the aircraft be reduced to acceptable levels. In order to achieve the required acceptable boom levels, sonic boom contributions from each component on the aircraft must be reduced to the lowest possible level.

All-internal compression inlets are desirable from a sonic boom reduction standpoint, because they may be designed with no oblique shock waves generated by an external compression system that would contribute to sonic boom signature. However, attempts to design these inlets have been generally unsuccessful, primarily due to large amounts of bleed required for inlet starting and started operation. Since these designs typically utilized fixed geometry, large amounts of bleed were necessary to provide the effective flow area ratio from the inlet entrance to inlet throat to allow the inlet to start (establish a supersonic flow field from the inlet entrance to the inlet throat). Large amounts of bleed were also necessary during normal operation because these inlets did not incorporate a stability system. This trend is typical of inlets that do not incorporate a stability system. Adequate inlet stability margins for inlet operation prior to unstart can only be provided by the fixed geometry bleed systems by prohibitively bleeding large amounts of bleed airflow during normal operation. The development of a low sonic boom aircraft therefore requires an innovation in supersonic inlet design.

Summary of the Invention

The inlets disclosed and claimed herein provide high performance, large operability margins, i.e. terminal shock stability that reduces the probability of inlet unstart, and 5 contribute little or nothing to the overall sonic boom signature of the aircraft. The characteristics of these inlets include very high internal area contraction or compression and very low external surface angles. The design concept of this invention is a very high to all internal compression inlet, in which all 10 shocks from the internal inlet surfaces are captured and reflected inside the inlet duct (no compression system shocks radiated external to the inlet duct). Additionally, they allow all of the external nacelle surfaces to be completely or very nearly aligned with the external flow (zero external surface 15 angles). These low profile external surfaces do not produce a shock wave that contributes to the sonic boom problem. In this invention, an all-internal compression inlet is combined with a shock stability bleed system. The innovative application of a shock stability bleed system can prevent inlet unstarts caused 20 by both internal and external flow disturbances, and provide large shock stability margins, thereby making the all internal-compression, or near all-internal compression inlets feasible for application to supersonic cruise vehicles.

The inlet shock stability system consists of bleed regions 25 that duct bleed airflows to variable area exits. The stability system incorporates either passive or active exit area controls. This system prevents inlet unstarts by removing airflow through a large open throat bleed region to compensate for reductions in diffuser (engine) corrected airflow demand. Because the 30 stability bleed is not removed until the inlet terminal shock moves upstream over the bleed region, the necessary normal shock

operability margin is provided without compromising inlet performance (total pressure recovery, and distortion) and without requiring prohibitive amounts of performance bleed during normal inlet operation. Research has demonstrated that
5 the utilization of a variable bleed exit on a large open throat bleed region can provide very large inlet stability margins for both internal and external airflow variations. The appropriate placement of a stability bleed system in the throat of an all internal-compression inlet makes the design of such a
10 configuration feasible.

This all internal-compression inlet concept is designed to provide the high performance and reliability required for a highly efficient supersonic aircraft and minimally contribute to sonic boom signature. The unique feature of the proposed design
15 is the utilization of an all-internal compression scheme combined with a shock stability system. This type of inlet offers the opportunity to consider external surfaces that are substantially aligned with the approaching airflow that will not produce shock waves and the associated sonic boom. For
20 inlets of this type, all of the supersonic compression is generated by the contouring on the internal surface of the cowl since they do not employ a centerbody.

Other features and advantages of this invention will be apparent to those skilled in the art after reading the following
25 detailed description and the accompanying drawings.

Drawings

Figure 1 shows an isometric view of a low sonic boom all internal-compression inlet embodying this invention.

Figure 2 presents a horizontal cross-sectional view of the
30 inlet shown in Figure 1, showing the internal cowl surfaces and

an indication of the inlet aerodynamics.

Figure 3 shows a downstream view of the inlet, i.e. in the direction of airflow through the inlet, rotated 90° from Figure 1 for ease of comparison with Figure 2.

5 Figure 4 presents a vertical cross-sectional view of the inlet that shows the internal contours on the top and bottom surfaces of the inlet.

Figures 5 through 9 show cross-sectional views of the inlet.

10 Figures 10 through 10-D, 11 and 11-A present cross-sections of the inlet that show the cowl surfaces in the on-design (supersonic cruise) position and in the most off-design (low-speed) collapsed condition. The design position is presented in figure 10 and the off-design position is shown in Figure 11.

15 Stability bleed regions are also depicted in Figure 10.

Figures 12 through 14 show a mechanical mechanism to provide variable geometry for a two dimensional (i.e. an inlet of rectangular cross-section in which the external surfaces from the leading edges to the inlet throat are composed of flat or 20 contoured plates) supersonic cruise inlet utilizing all internal-compression.

Figure 15 shows an alternate leading edge for the top and bottom surfaces.

25 Figures 16 through 18 present approaches to adjust the top and bottom sidewalls of an inlet that is sized to meet the airflow demand of an engine with a requirement for a very low entrance Mach number.

Figure 19 presents a configuration similar to the inlet of Figure 1 with the leading edges of the cowl staggered.

Figure 20 presents an alternate bifurcated inlet configuration that utilizes the staggered concept of Figure 19 in a back-to-back arrangement.

Detailed Description

5 The basic inlet concept is presented in Figures 1 through 14. Figure 1 shows an isometric view of the inlet, referred to generally as 1, and Figures 2 through 4 present cross-sections of the configuration. The isometric sketch in Figure 1 depicts a supersonic inlet 1 in which all the external surfaces are 10 flow-aligned, i.e aligned with the airflow approaching the inlet. The airflow approaching the inlet is substantially parallel to the inlet centerline; therefore, surfaces that are flow-aligned with the freestream airflow are also parallel to the inlet centerline. The initial external cross-sectional shape 15 of the inlet is rectangular and then transitions as indicated by the surfaces 21 to a round nacelle at the downstream end 10. If the propulsion system uses a square or rectangular nozzle, transitioning of the inlet surfaces, as shown by surface 21 in figure 1, to a round nacelle is not required; therefore, the 20 rectangular cross-section would be continued to the end of the nacelle, station 10. This inlet 1 is composed of four surfaces: the sidewalls 55 and 56 and top and bottom surfaces 53 and 52, respectively, of the inlet. As shown in Figure 3 (rotated 90° relative to Figure 1 for ease of comparison with Figure 2), 25 these surfaces (55, 56, 52 and 53) provide the internal channel 51 to duct the captured airflow 77 through the inlet to the exit station 10.

Referring to the horizontal cross-sectional view in Figure 2, inlet 1 uses a low-angle (typically about 5° or less relative 30 to the incoming airflow) initial compression wedge 3 on the internal cowl compression surface 2, which generates an initial

oblique shock 4, i.e. a shock wave with an angle less than 90° to the surface that is radiated out from the leading edge of from any compression surface angle. For example, a 5° wedge in a Mach 2.4 airstream generates an oblique shock wave with a 28.73° angle 5 to the incoming airflow. This internal cowl compression surface 2 includes the initial low angle wedge 3, an isentropic contour 5, a throat section 6 (minimum cross-sectional area), and a subsonic diffuser 7. Isentropic compression refers to a compression process that is generated by a continuous curvature 10 of the compression surface in which the airflow is progressively compressed or decelerated with no loss in the total pressure of the airstream. Isentropic compression can be approximated by using a series of small angle changes to develop the overall required compression. The isentropic compression contour 5 provides the additional required supersonic compression or 15 deceleration from the initial wedge 3 to the inlet throat section 6.

The isentropic compression flow field is depicted by the Mach waves 8. For example, in a typical supersonic transport 20 installation, operating at supersonic design conditions of about Mach 2.4, the supersonic airflow will have decelerated to about Mach 1.3 when it reaches the throat 6. A normal (terminal) shock 9 at the inlet throat 6 will typically further decelerate the airflow to about Mach 0.8. The subsonic airflow downstream 25 of the terminal shock 9 continues to decelerate in the subsonic diffuser 7 that extends from the inlet throat 6 to the diffuser exit station 10.

The internal inlet duct 51 is rectangular to a location just downstream of the inlet throat 6 and then transitions to a 30 circular cross-section at a station just upstream of the engine location 10. Tangent lines 11 that are created by filleting the

corners are shown. The subsonic diffuser contains a break in the contour that provides an opening 12 to a typical overboard bypass system (not shown). As indicated in the downstream view of the inlet presented in Figure 3, the initial inlet external surfaces are 16, 17, 18, and 19. Figure 2 shows that external surfaces 16 and 17 are at 0° (flow aligned).

A downstream view of the inlet configuration is presented in Figure 3. The distance between the internal surfaces 14 and 15 is equal to the engine diameter 61. These internal surfaces are also shown in Figure 4. The top wall 53 is composed of an inner wall 14 and an exterior surface 18. Surface 14 exhibits an initial small compression surface angle to the incoming airflow 77 that is captured by the inlet. This small internal angle is necessary because the external angle for surface 18 is about 0° . This small internal compression angle for surface 14 results in a weak shock wave 54. Proceeding downstream from the initial wedge, surface 14 then transitions to an axial direction with an expansion of the flow field. This expansion is represented by an initial expansion wave 64 and a final expansion wave 65. This internal compression - expansion created by surface 14 and by the identical opposite surface 15 should have very little effect on the overall inlet compression process. The airflow conditions approaching the inlet throat terminal shock 9 should mainly be the result of the compression system created by the cowl surface 2 as shown in Figure 2.

Figure 5 shows the locations of several cross-sections (A-A to D-D) on the inlet 1. Cross-sectional views for these cross-sections are presented in Figures 6 through 9. Again as for Figure 3, note that the cross-sections are rotated for ease of comparison with Figures 2 and 5. Cross-section A-A is shown in Figure 6. In Figure 6, both the internal duct (composed of

surfaces 2, 14 and 15) and the external shape (composed of surfaces 16, 19, 17, and 18) are rectangular. The shape is similar for Figure 7 (cross-section B-B, Figure 5) except the distance between the cowl surfaces 2 show the restriction of the 5 duct area in the throat (minimum area) of the inlet. Figure 8 shows the transitioning of the inlet to circular, both internally and externally. The external surfaces are transitioned by the circular arcs 21, and the internal surfaces are transitioned by the circular arcs 20. Figure 9 shows a 10 cross-section near the exit of the inlet in which both internal and external contours are circular.

This inlet utilizes a significant amount of isentropic compression. The benefits of isentropic compression and a throat Mach number of about 1.3 will result in excellent total 15 pressure recovery. In addition, the overall reduction in performance due to boundary layer will be lower for an all-internal compression inlet than for of a conventional mixed-compression inlet, since the basic inlet of this disclosure does not employ a centerbody. Inlets must provide a range of mass 20 flows over which they can operate without the occurrence of an inlet unstart. Traditional performance boundary layer bleed systems can provide only a small operability margin. Since this margin is generally not sufficient, additional margin is provided by operating at reduced performance levels. A very 25 high level of performance and an adequate operability margin to prevent inlet unstart can be realized through the utilization of a stability bleed system. This system allows operation of the inlet at the optimum performance condition, and yet provides significant shock stability margins under conditions where an 30 inlet unstart might tend to occur, such as when the terminal shock moves upstream through the throat region of the inlet due

to a transient reduction in engine airflow demand. The inlet stability bleed system compensates for changes in diffuser exit (engine) airflow demand by removing increasing amounts of airflow from the inlet as the terminal shock moves upstream over 5 the open bleed regions that are located in the throat of the inlet. The stability system functions to provide the necessary stability margins to prevent inlet unstart without prohibitive amounts of bleed during normal inlet operation by using variable area exit control valves that limit the amount of bleed flow 10 until increased bleed is required in response to the upstream movement of terminal shock resulting from a transient disturbance in inlet subsonic diffuser airflow.

An inlet throat stability bleed system is shown in Figures 10 through 10-D. Uniformly distributed porous bleed is the 15 preferred method to remove bleed airflow; however, any type of bleed opening can be used. For the preferred configuration, porous bleed surfaces are located in the inlet throat section. Cowl bleed regions 23 are located in cowl section 29, and sidewall bleed regions 24 are located in sidewalls 14 and 15 20 (see Figures 10-B and 10-C). In the preferred embodiment, the open bleed regions 23 and 24 consist of the inlet surfaces with 0.125-inch holes drilled normal to the surface to obtain 40% open area (40% porosity). The bleed holes are located on 0.1875-inch centers with the holes in adjacent rows staggered to 25 obtain a uniform distributed pattern. The preferred bleed surface would include a surface thickness to hole diameter ratio of 1.0. The sidewall bleed 24 extends beyond the design cowl position so that bleed can be removed during off-design operation. Folding compartment seals 44 are used to direct the 30 inlet bleed from the bleed surfaces (23 or 24) to exit passages and variable-exit area controls, such as active or passive fast-

acting valves (not shown) at the bleed plenum exit, which control the amount of bleed that is removed from the inlet.

Figures 10, 10-D, 11 and 11-A also illustrate one variable cowl geometry system that can provide the necessary variation of the internal surface geometry and well as changing the duct cross-sectional area at the inlet throat. Engine airflow demand varies as the flight vehicle speed changes from takeoff to supersonic cruise; therefore, a variation in the minimum duct area is necessary to accommodate the changes in airflow. For efficient inlet operation, the internal surface geometry must also be changed as the speed of the aircraft changes. This surface variation as the flight vehicle speed changes allows the most optimum compression of the airflow that enters the inlet system. The internal inlet duct must be opened to a large area as illustrated in Figure 11 during takeoff and for low speed flight. As the flight vehicle accelerates to supersonic conditions, the variable geometry system is used to both provide the proper variation in inlet throat area as well as surface geometry. Comparison of the internal duct 51 geometry of Figures 11 and 10 shows the wide changes in the inlet geometry from takeoff to cruise speeds. Three hinge locations 25, 26, and 27 are shown in the Figures; however, the number of hinges may be any number suitable to provide proper cowl geometry at off-design conditions. The variable cowl consists of an upstream section 28 hinged (25) at the upstream station and connected to additional cowl sections 29 and 30 with hinges 26 and 27, with the downstream end of the last section 30 including a guide pin 31 in a groove 32 (detail) to allow the length change for off-design operation, Figure 10. The track 32 for the guide pin 31 is aligned to properly position the downstream end of the last cowl section 30. All cowl sections are hinged to the first cowl

section 28. A sketch of the cowl in the off-design position is presented in Figure 11. Note the change in position of the downstream guide pin 31 between Figures 10 and 11.

Additional details of this variable cowl geometry scheme
5 are presented in Figures 12 through 14. Hydraulic actuators 43
are utilized to collapse the cowl surfaces for off-design
operation. These cylinders 43 are pinned 45 to bracket 33 that
is attached to the outside surface 16 or 17 at one end and
pinned 46 at the other end to bracket 34 that is attached to
10 cowl surface 29. The hydraulic cylinders are attached to a
common fluid supply source so that uniform movement is obtained.
Two actuators are shown in Figure 14; however, any number could
be used that would fit within the space available and effect the
desired movement of the cowl surfaces. While the hydraulic
15 actuators provide the actuating power, the actual movement of
the second cowl section 29 is controlled by a scissors
arrangement that provides parallel positioning of the section
for any operating condition of the inlet. Figure 12 shows that
this scissors arrangement is comprised of link bars 35 and 36
20 that are pinned 37 and 38 to brackets 39 and 40 at the outer
ends and pinned to frame 41 at pin 42. Frame 41 is also shown
in the isometric sketch of Figure 14. The off-design position of
the cowl 29 is shown in Figure 13. As indicated in a comparison
25 of the cowl 29 vertical positions between Figures 12 and 13, the
inlet throat surface can be actuated to provide a significant
increase in duct area for off-design operation. The parallel
throat sections 29 at design and off-design positions are shown
in Figures 12 and 13.

Figure 1 shows an inlet with all external surfaces flow-
30 aligned. However, this design requires the use of a small
amount of compression on the wall of the inlet as shown in

Figure 4. Although small, as discussed for Figure 4, this additional compression does result in some 3D flow in the inlet. The small internal compression wedges on the top and bottom inlet walls of the inlet generate a flow field that has a vertical crossflow component. This crossflow component in the vertical plane of the inlet interacts with the crossflow component that is generated by the compression surfaces in the horizontal plane. This interaction results in a 3D flowfield. This additional compression could be avoided if a configuration as presented in Figure 15 is utilized. This design basically reverses the initial leading edge angle for the top and bottom walls from a wedge angle on the inside surface to an angled wedge 22 on the exterior surface 71. Therefore, the resulting internal surface is flat with no additional compression to create 3D flow effects. While the small angle on the exterior surface will generate a weak shock wave, it should not significantly contribute to the sonic boom signature. Thus, the inlet configuration 81 of Figure 15 offers the significant advantages of the all-internal compression configuration with a small compromise in the external surface sonic boom contribution for optimum internal aerodynamics.

The basic design problem of providing low external surface angles for lower supersonic cruise Mach number inlets is that the ratio of inlet capture area to engine face area gets smaller as the inlet design Mach number decreases, particularly for inlets matched to jet engines that require low entrance Mach numbers. For the Mach 2.4 inlet design that is presented in Figures 1 through 14, sizing of the inlet capture area to supply airflow to the jet engine 61 at an entrance Mach number of about 0.4 provides an inlet 1 in which the angles of the external surfaces 16, 17, 18 and 19 are 0° relative to the approach

airflow 77 as shown in Figures 1 through 14. For this flow-aligned external-surface design, the external cross-sectional area of the inlet at the engine face station 10 was increased by an amount necessary to provide a sufficient annular airflow 5 passage between the outside of a jet engine 61 and the outer nacelle 62 (Figure 2) for cooling airflow around the exterior of the engine. The inlet of Figures 1 though 15 represent a design that has a minimum contribution to the sonic boom of a supersonic cruise aircraft.

10 If an engine is selected for a Mach 2.4 inlet that requires an entrance Mach number less than about 0.4, all of the external surfaces cannot be aligned with the approach airflow. For low Mach number at the entrance to the engine, the engine area relative to the inlet entrance area will be larger, and a slight 15 external angle on the top 16 and bottom 17 surfaces will result. Two transition schemes for the additional bulge are shown in Figures 16 through 18. Since the largest cross-sectional area is at the inlet exit 10 (engine entrance), the largest bulge on the external surface will be at this location. To obtain a low 20 boom design for this inlet/engine combination, the external surface of the inlet is transitioned to the larger engine face area over a large distance on the nacelle upstream of the bulge, allowing a very small external angle and minimizing the resulting shock strength. The transitioning may have a circular 25 arc shape 13 as shown in Figure 16. As shown in Figures 17 and 18, the transitioning to the larger engine may extend along the entire surface 72 as a curved flat surface 73 to the engine face 10. In Figure 18, only the surface contour 73 is shown. In either case, the low angled contouring of the transitioning 30 surface (13 or 73) would have little to no contribution to the sonic boom signature of the aircraft.

Several alternate configurations can be derived from the inlet design that is shown in Figures 1 through 18 without departing from the basic design approach to identify a very low boom inlet configuration. Two such inlet configurations are 5 shown in Figures 19 and 20. A staggered inlet configuration 90 is presented in Figure 19. Only the supersonic diffuser of the inlet, from the leading edges 67 and 68 to the inlet throat station 97, is shown in Figure 19. The subsonic diffuser for this configuration would be similar to the one 7 shown in Figure 10 2. This inlet 90 is basically identical to the inlet 1 of Figure 1 except the leading edges 67 and 68 have been staggered to begin at different axial stations. This design offers the same performance and operability, would incorporate stability and variable geometry systems, and would have no external shock 15 waves (no sonic boom) during operation at design conditions. Staggering of the leading edges offers some advantage for spilling airflow at off-design conditions. For the inlet 1 configuration of Figure 2, in which the leading edges of the cowls 16, and 17 begin at the same axial position, airflow cannot 20 be spilled around the cowling during off-design flight speed conditions until the inlet unstarts. Upon unstart, airflow can spill around the cowling after it passes through a strong normal or bow shock that is located ahead of the inlet. Spilling airflow behind a strong normal shock has higher drag than 25 supersonic spillage (spilling behind a supersonic oblique shock). Staggering of cowl lips 67 and 68 of inlet 90 (Figure 19) offers an unstalled inlet in which the normal shock is located ahead of lip 67 and an oblique shock is generated by lip 68. This oblique-normal shock combination offers more efficient 30 spillage of the airflow due to the reduction of the velocity through the oblique shock prior to further deceleration through the normal shock.

An alternate inlet 50 developed by using the same design approach as for the inlets 1 and 90 of Figures 2 and 19 is shown in Figure 20. The inlet 50 of Figure 20 employs the staggered leading edge inlet design of Figure 19 in a back-to-back arrangement to create a bifurcated configuration with a variable geometry centerbody and flow aligned external surfaces 76 and 78. Inlet 50 of Figure 20 is derived by placing surfaces 96 of two inlet 90 from Figure 19 together in such a way that a back-to-back bifurcated inlet configuration is obtained. The internal duct rectangular cross-section at the throat of each of these inlets would be transitioned to a semi-circle at the exit 79 of the inlet to jointly form a round entrance for a single engine. The large amount of staggering of the leading edges, leading edge 85 to 86 and leading edge 85 to 87, for this configuration would provide nearly the same off-design spillage characteristics as a more conventional mixed-compression inlet design. This inlet design 50 has all shock waves 62 and 88 internal to the duct and all external surfaces 76 and 78 of cowls 74 and 75 are flow aligned; therefore, this design, unlike conventional designs, will not contribute to the sonic boom signature of the aircraft at design operating conditions.

The inlets defined in Figures 1 through 20 represent a new approach to inlet design. This invention offers inlet design options that can lead to new, more efficient, safer, and more environmentally friendly aircraft. This inlet concept may offer integration options that were not possible with more traditional inlets. This design approach can provide an inlet configuration that will provide enabling technology for a quiet (low sonic boom), efficient, supersonic cruise aircraft.

While 2-dimensional inlet configurations have been described in Figures 1 through 20, it will be evident to those


skilled in the art that the concept may be extended to the design of axisymmetric inlets with similar attributes and benefits.



It is understood that the invention is not limited to the specific embodiments herein illustrated and described, but may be used in other ways without departing from its spirit. Other embodiments of the internal compression inlet described herein that suggest themselves to those skilled in the art are intended to be covered by the claims of this disclosure which are as follows:

Abstract of the Disclosure

All-internal compression inlets for supersonic aircraft, with variable geometry systems and shock stability bleed systems provide high performance, large operability margins, i.e. 5 terminal shock stability that reduces the probability of inlet unstart, and contribute little or nothing to the overall sonic boom signature of the aircraft. These inlets have very high internal area contraction or compression and very low external surface angles. All shocks from the internal inlet surfaces are 10 captured and reflected inside the inlet duct, and all of the external nacelle surfaces are substantially aligned with the external airflow. The inlet shock stability system consists of bleed regions that duct bleed airflows to variable area exits with passive or active exit area controls. This reduces the 15 risk of inlet unstarts by removing airflow through a large open throat bleed region to compensate for reductions in diffuser (engine) corrected airflow demand. Because the stability bleed is not removed until the inlet terminal shock moves upstream over the bleed region, the necessary normal shock operability 20 margin is provided without compromising inlet performance (total pressure recovery, and distortion).

Figure 1

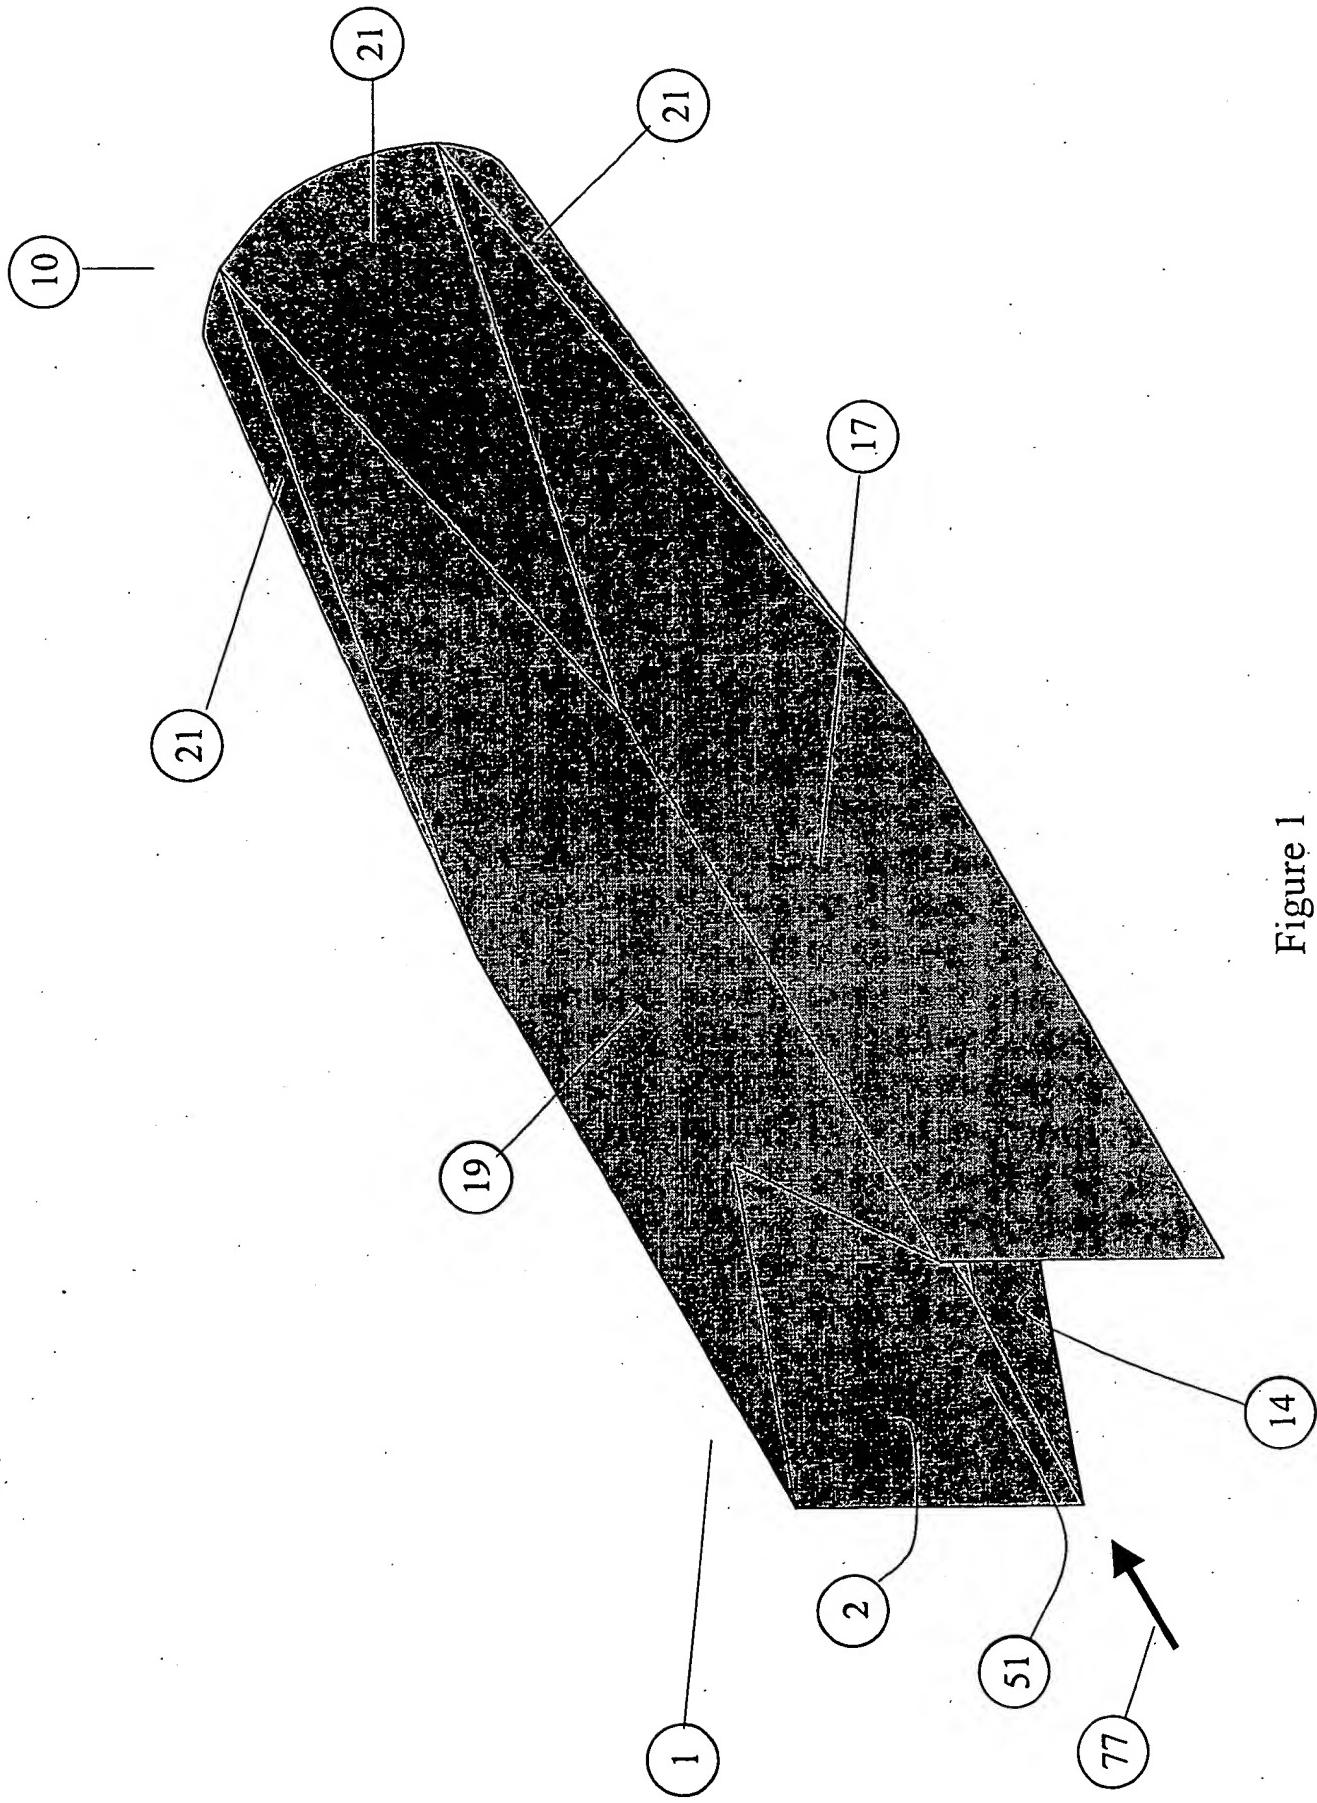

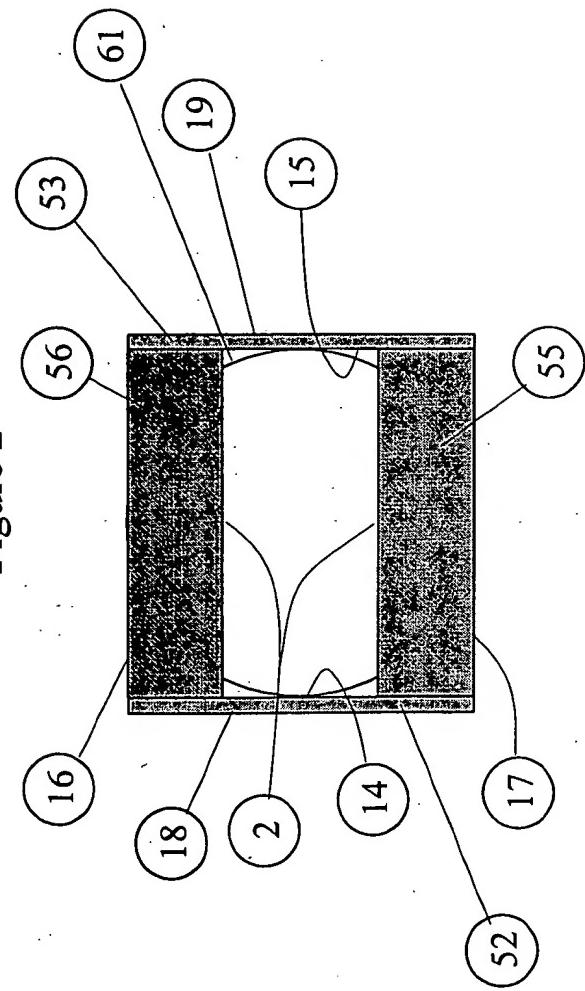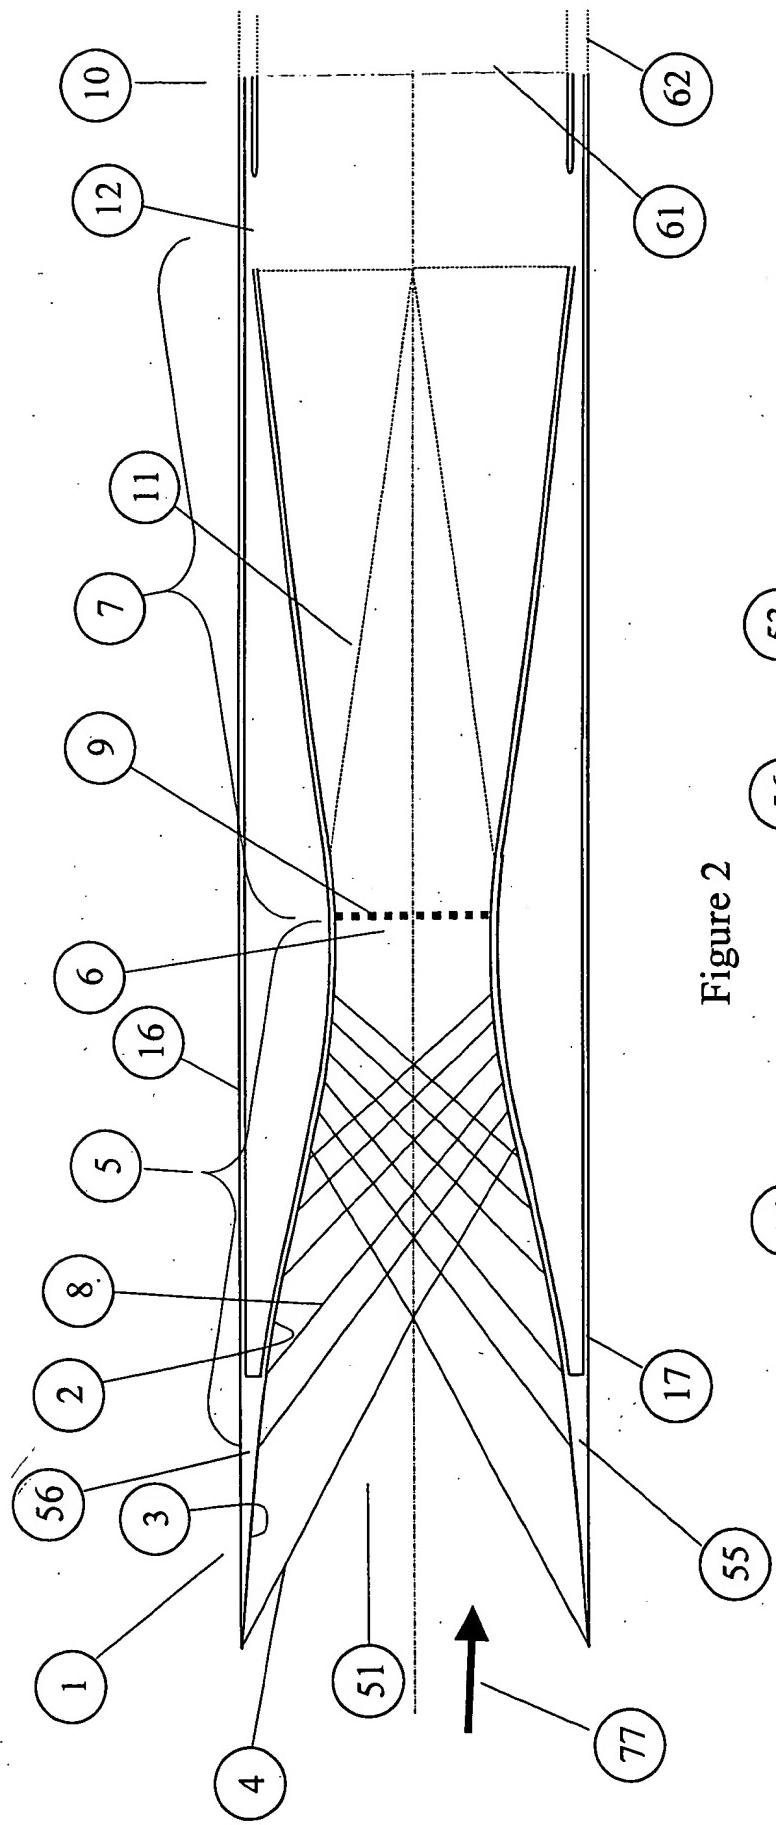

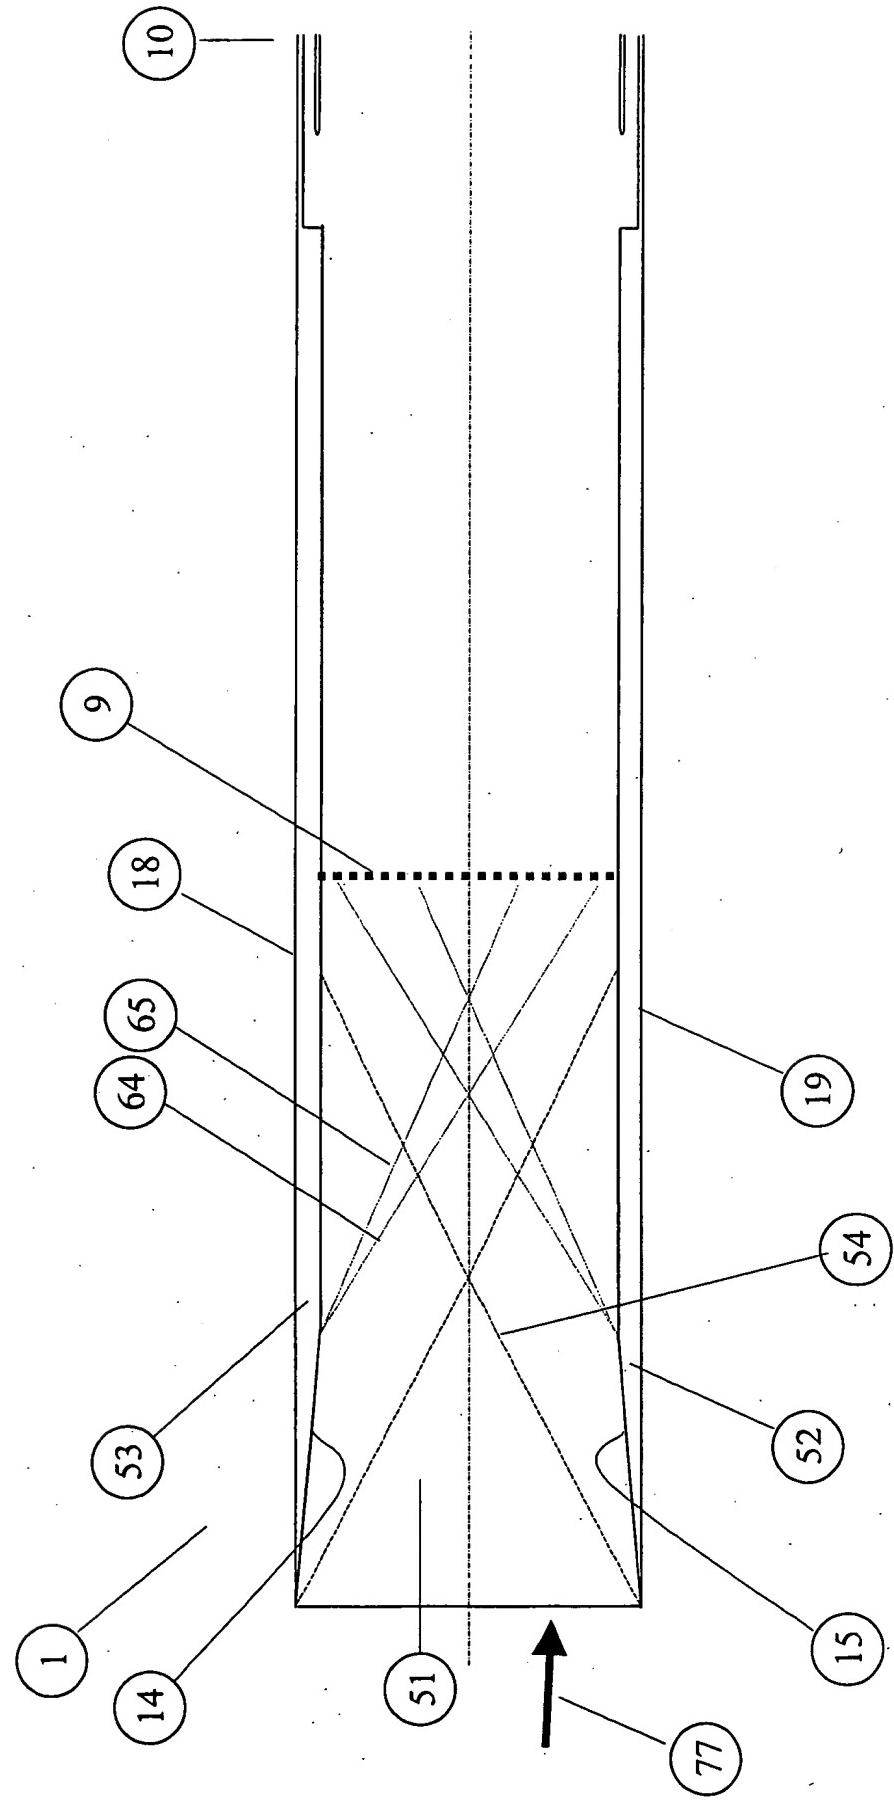


Figure 4

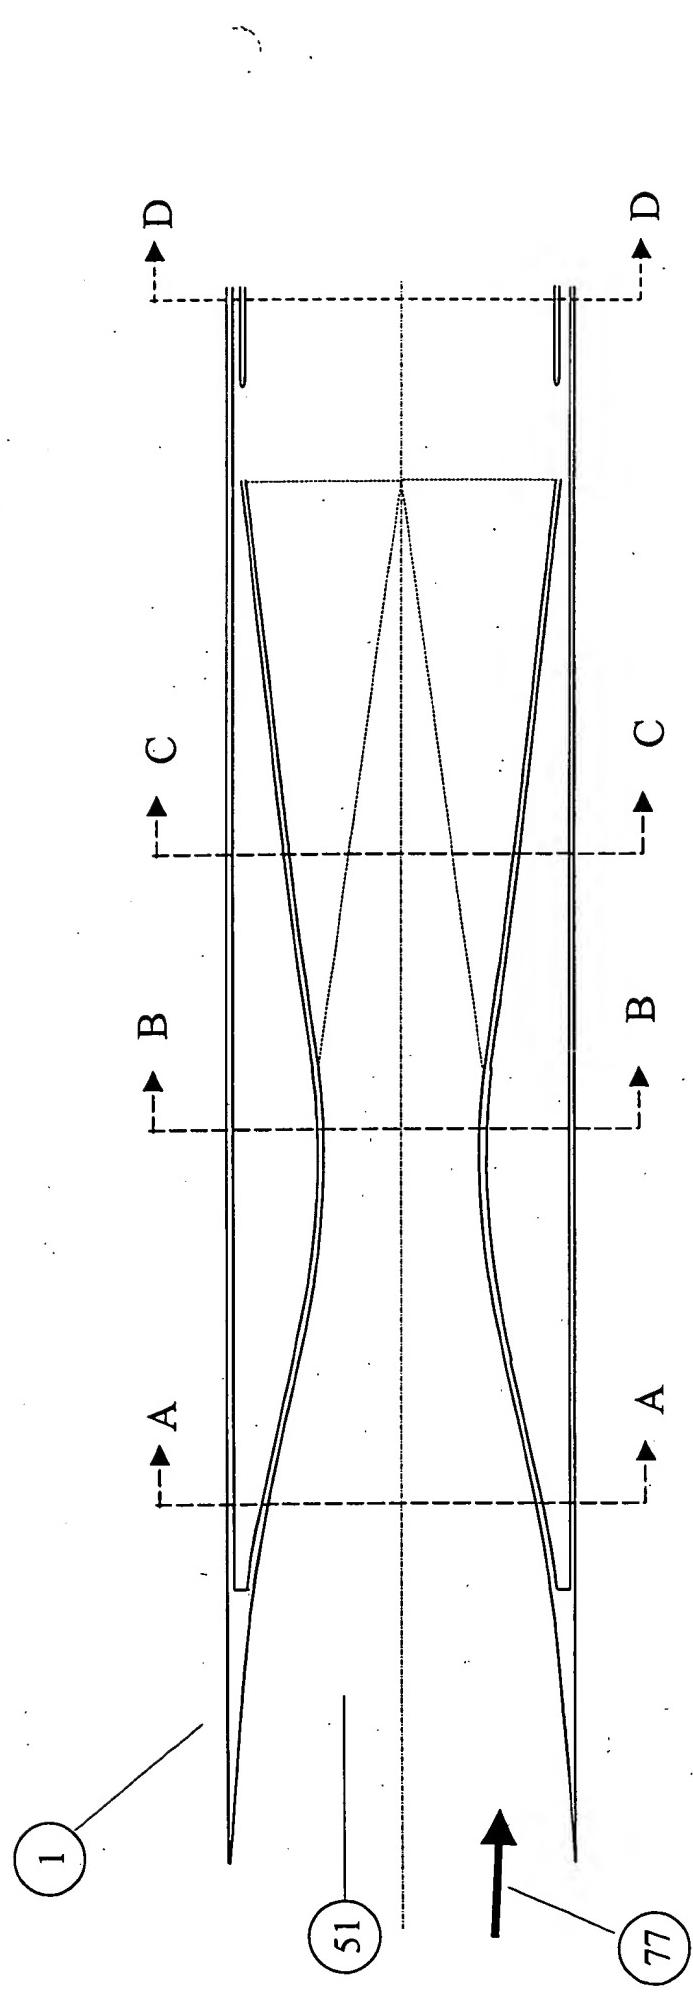


Figure 5

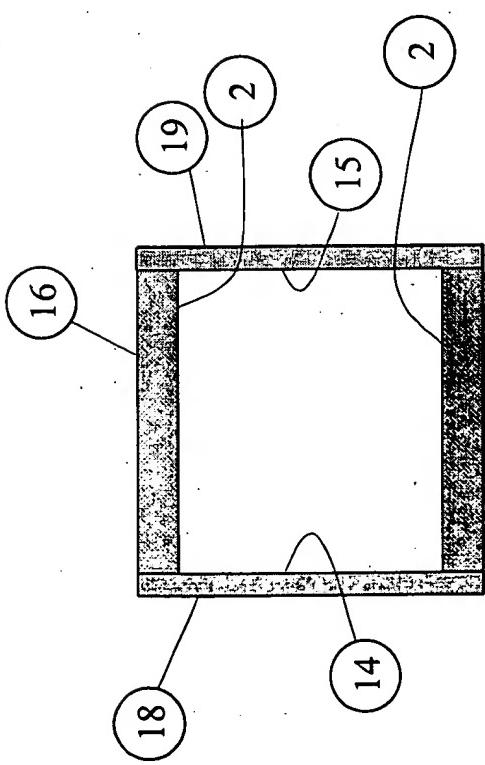


Figure 6

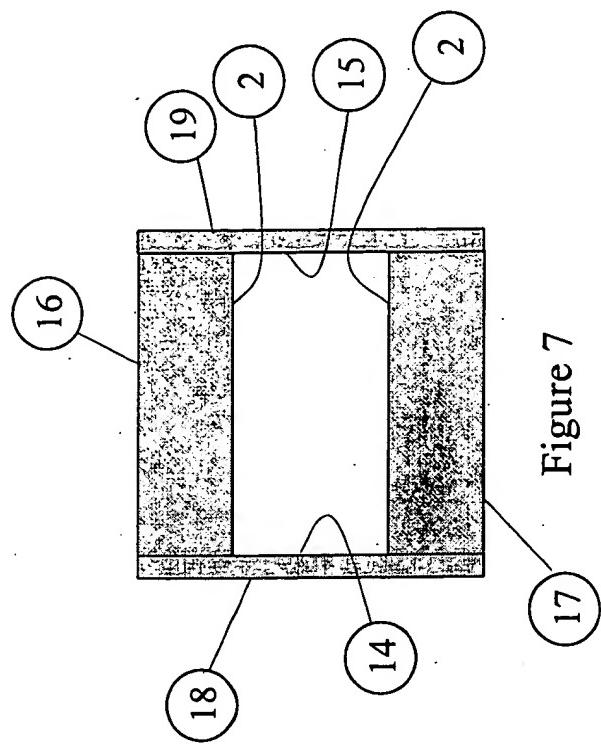


Figure 7

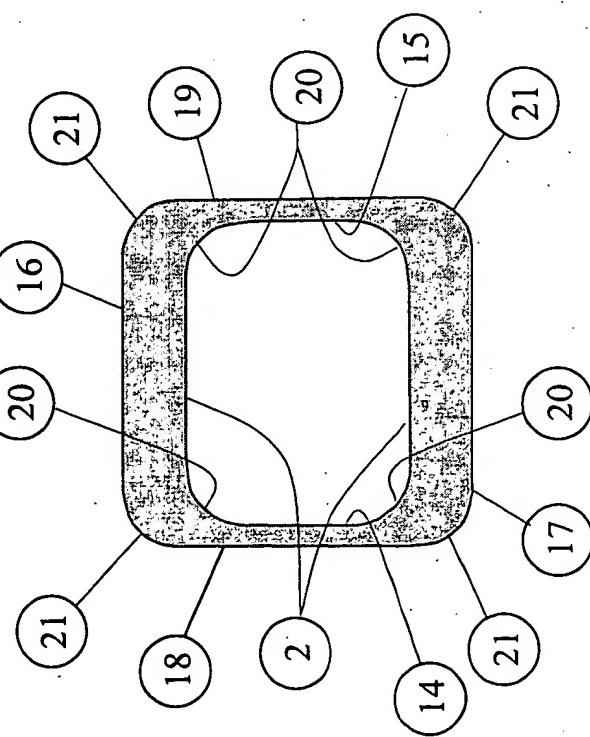


Figure 8

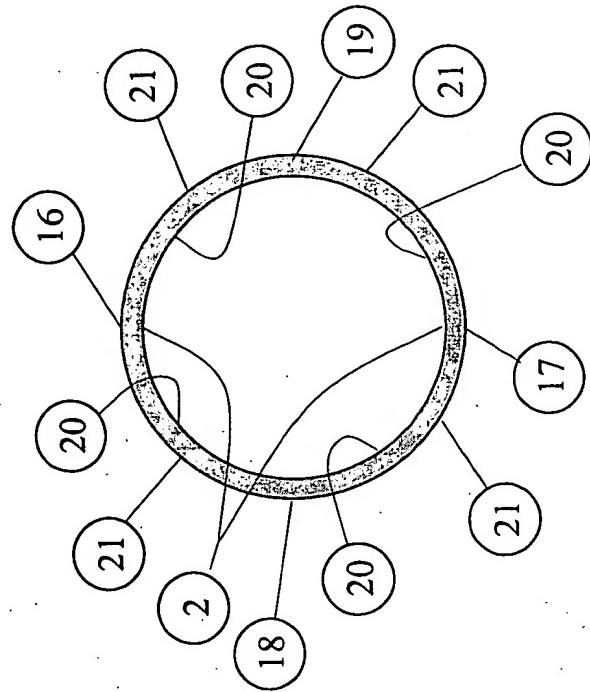


Figure 9

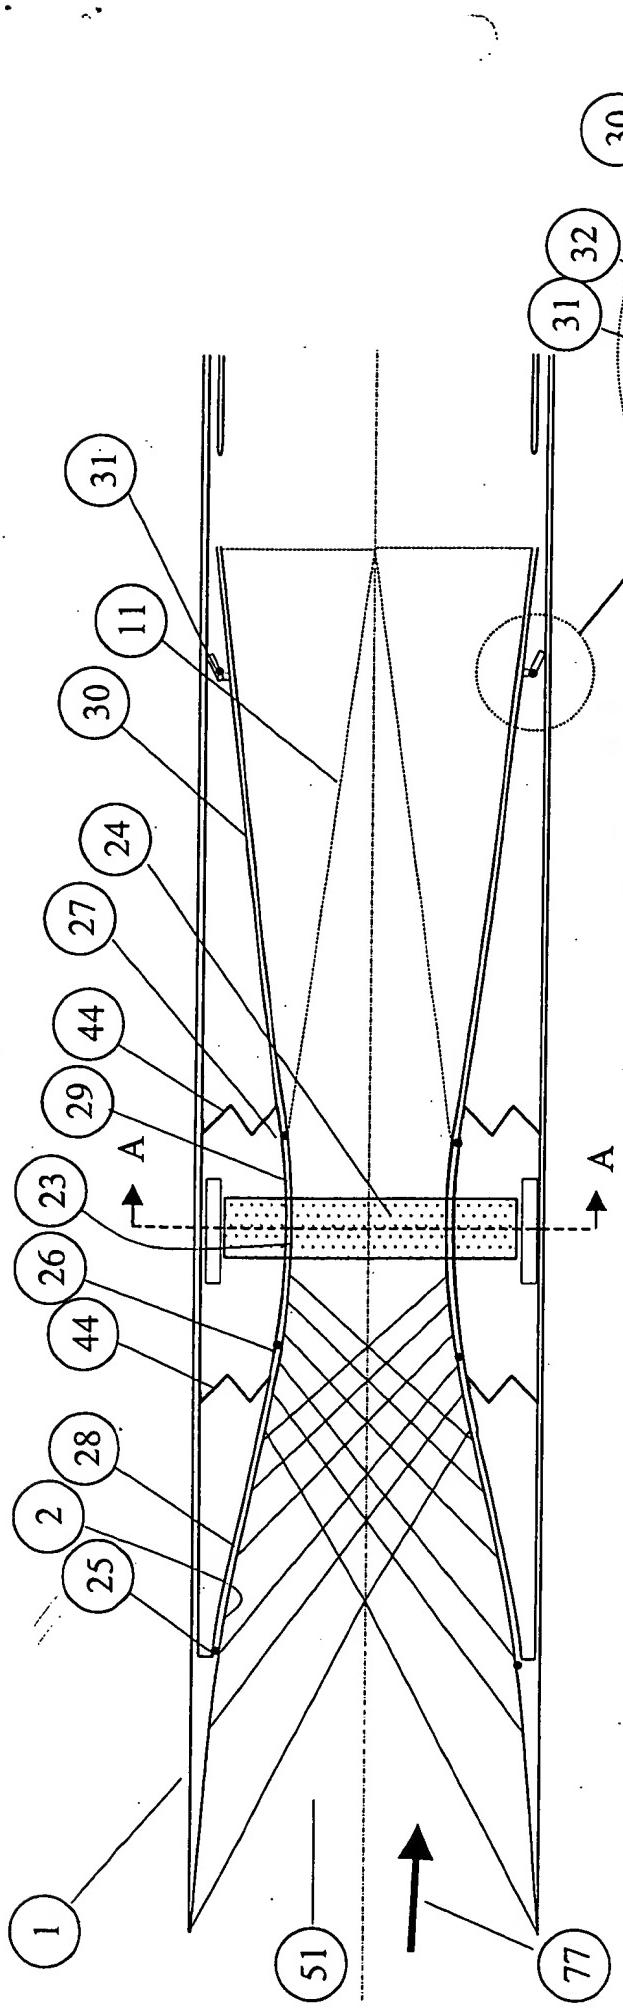


Figure 10

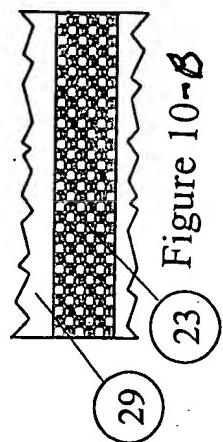


Figure 10-B

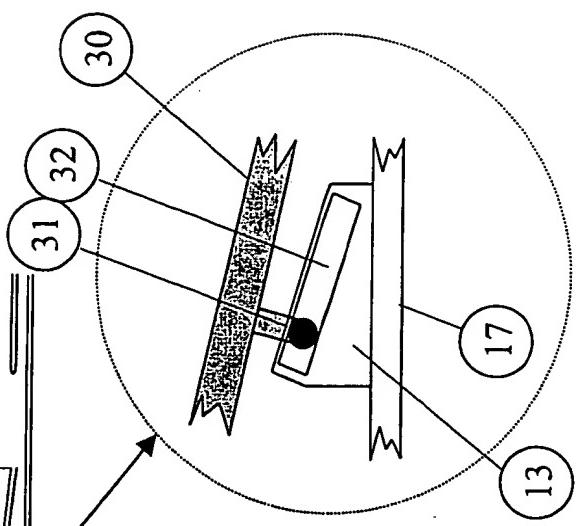


Figure 10-D

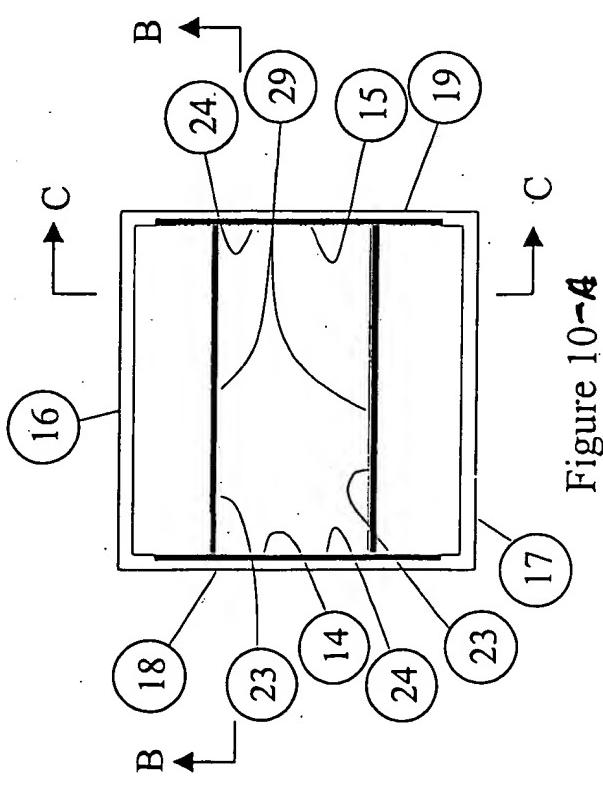


Figure 10-C

Figure 10-A

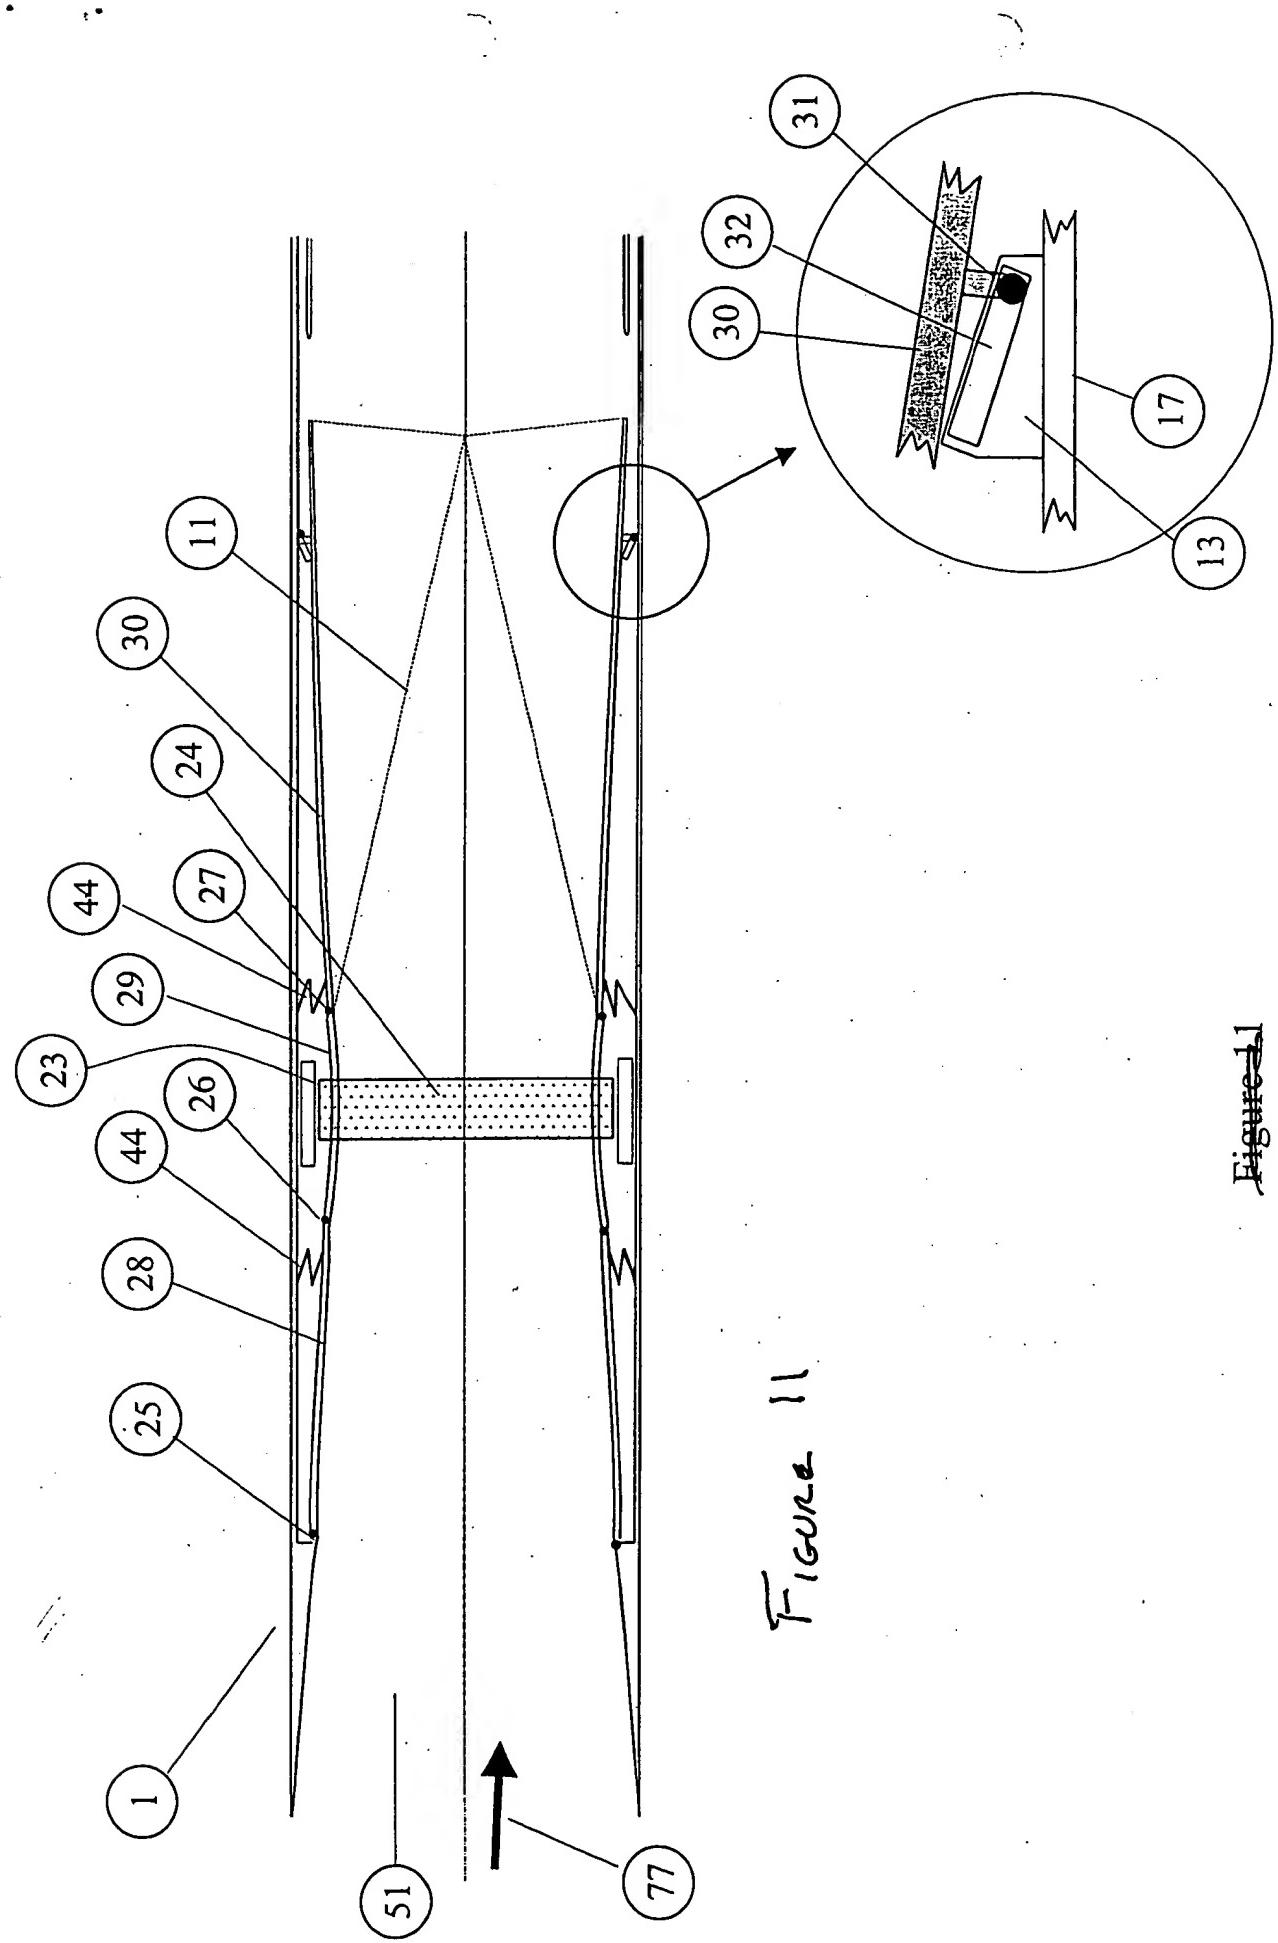


Figure 11

Figure 11-A

Figure 11-A

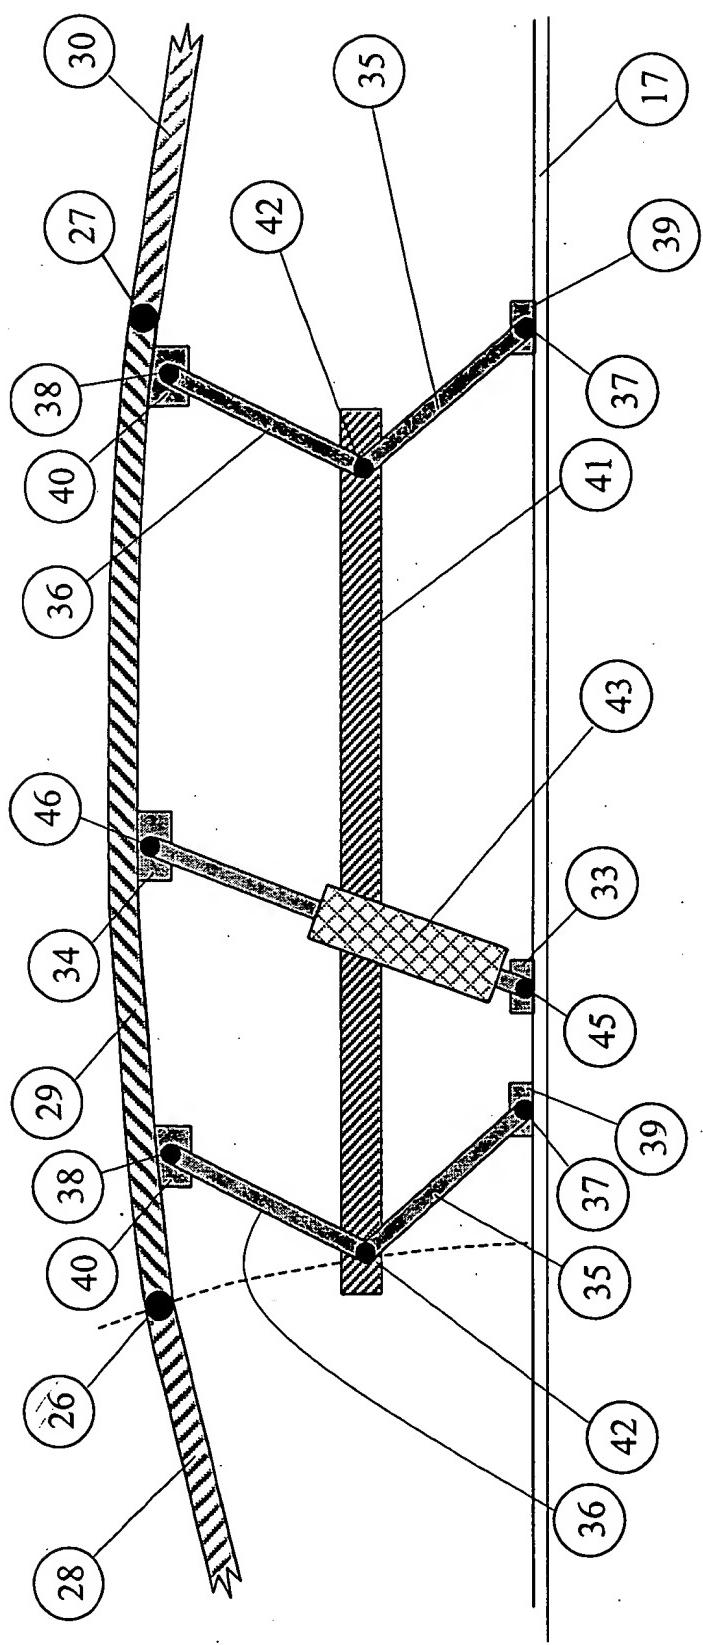


Figure 12

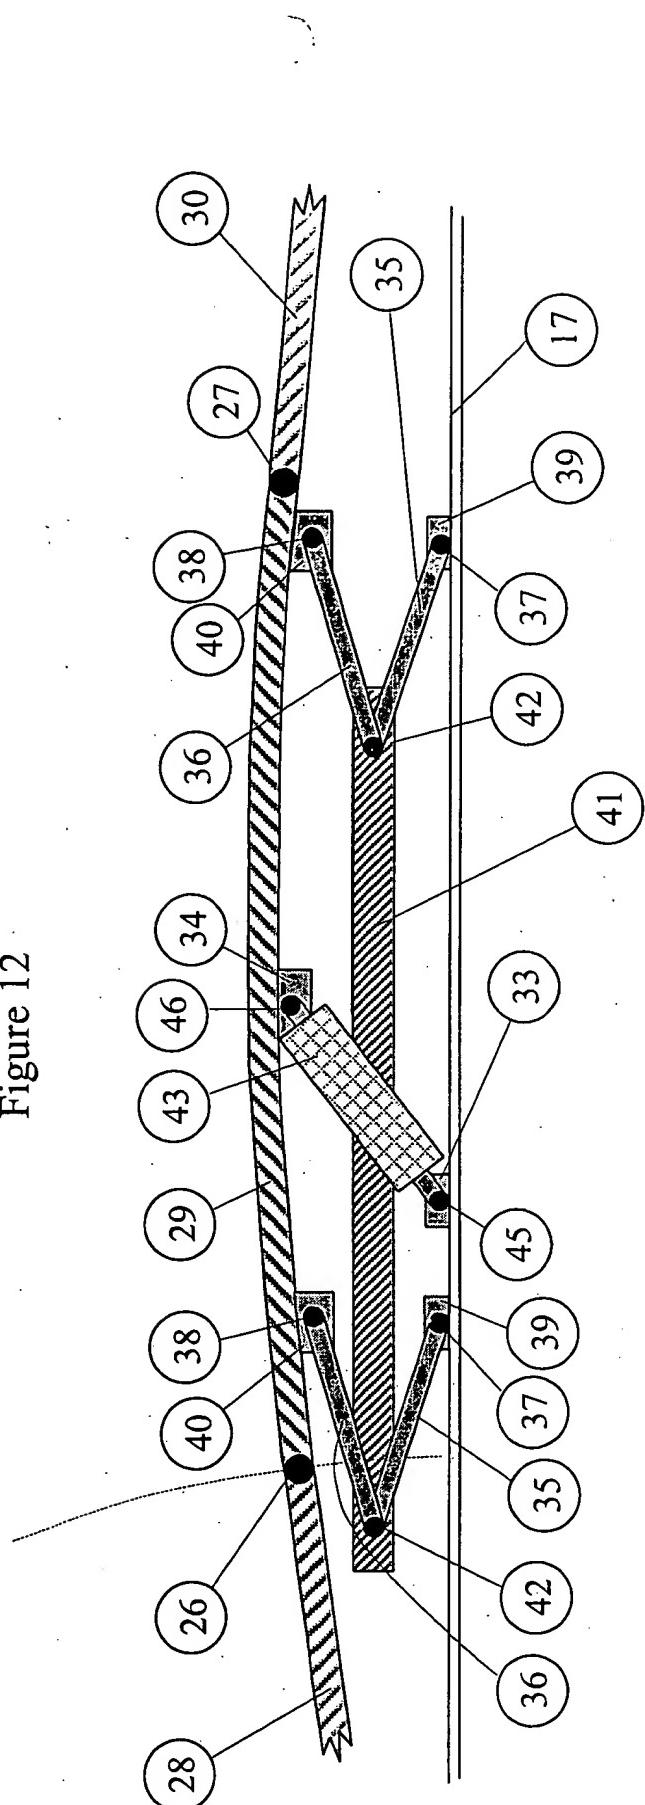


Figure 13

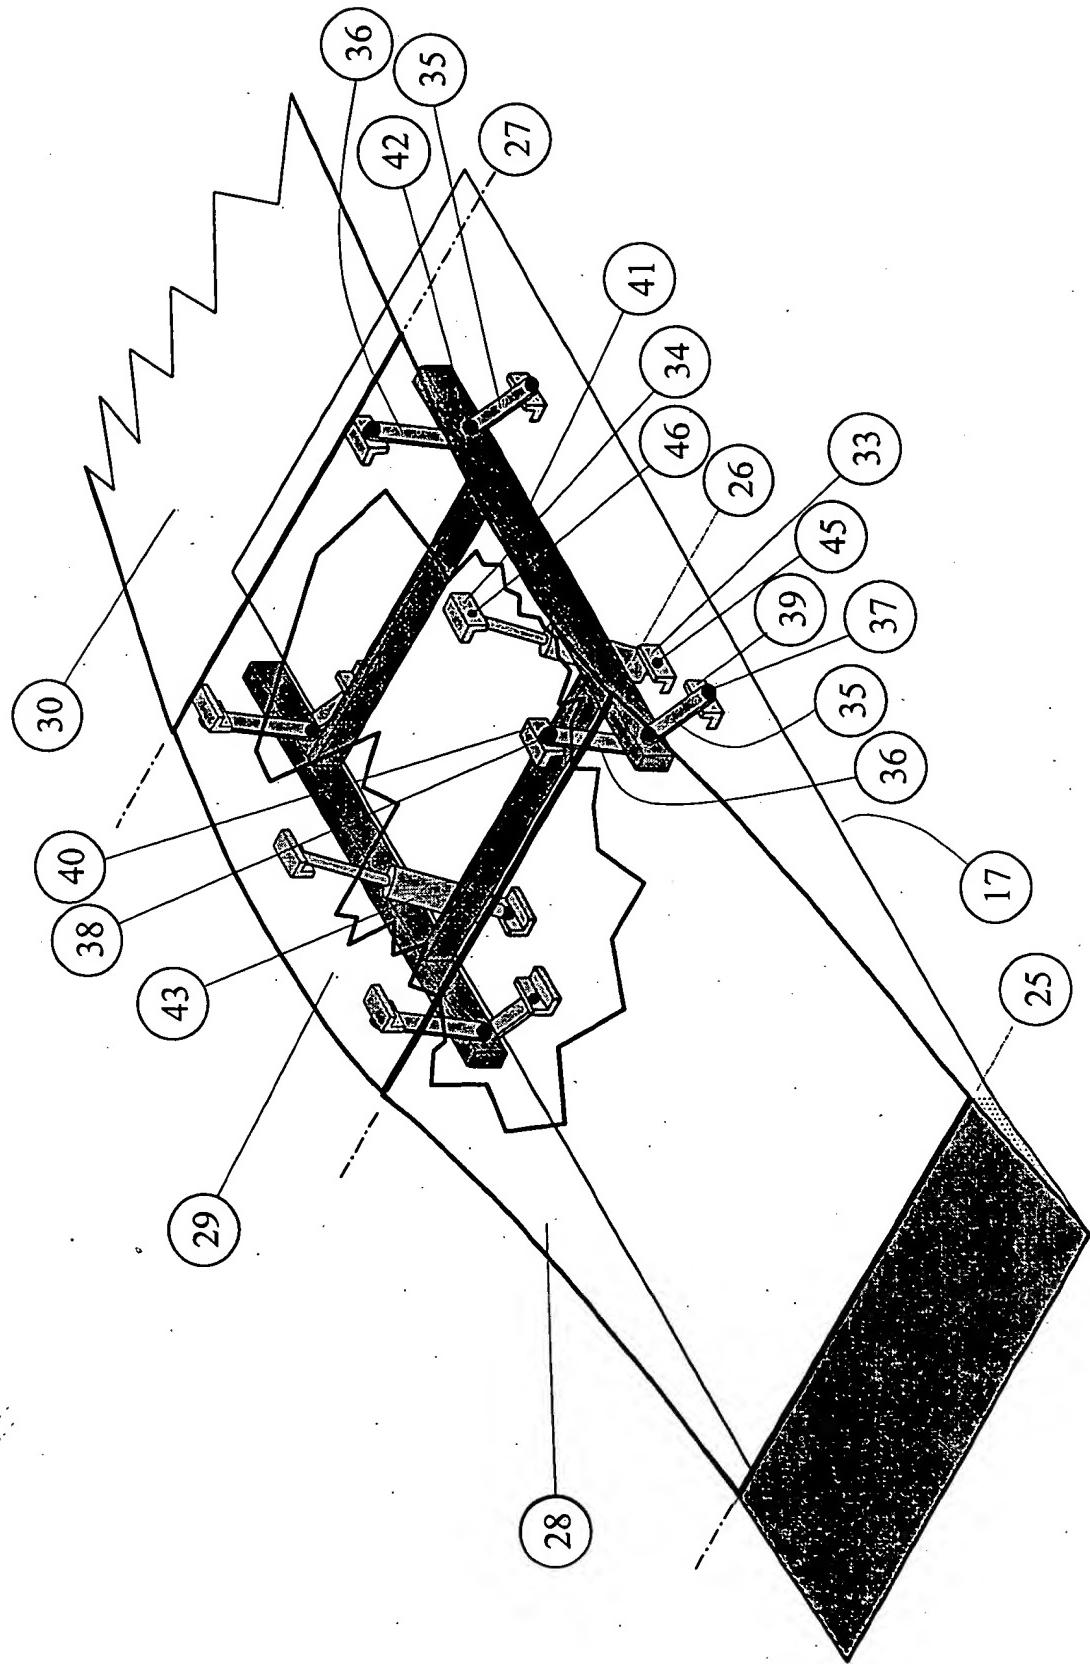
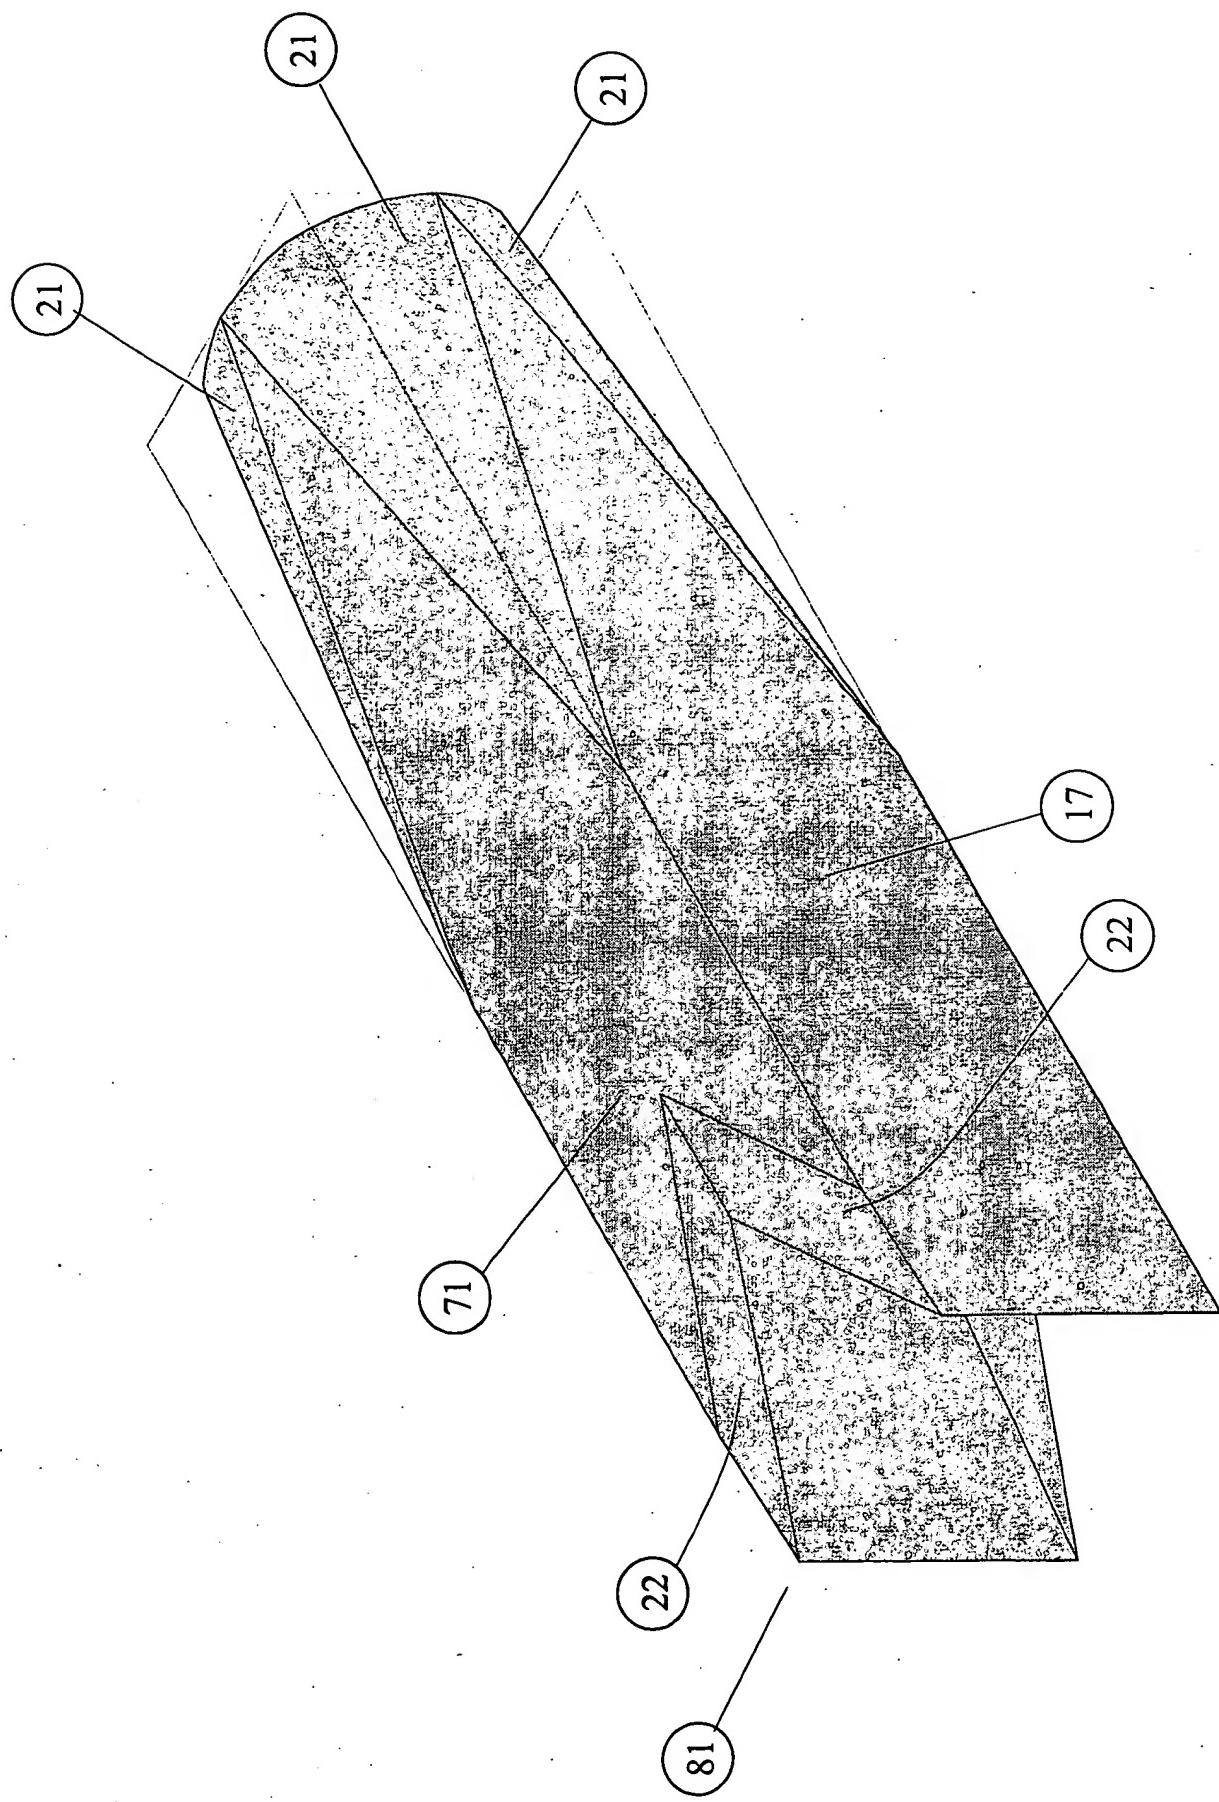


Figure 14

Figure 15



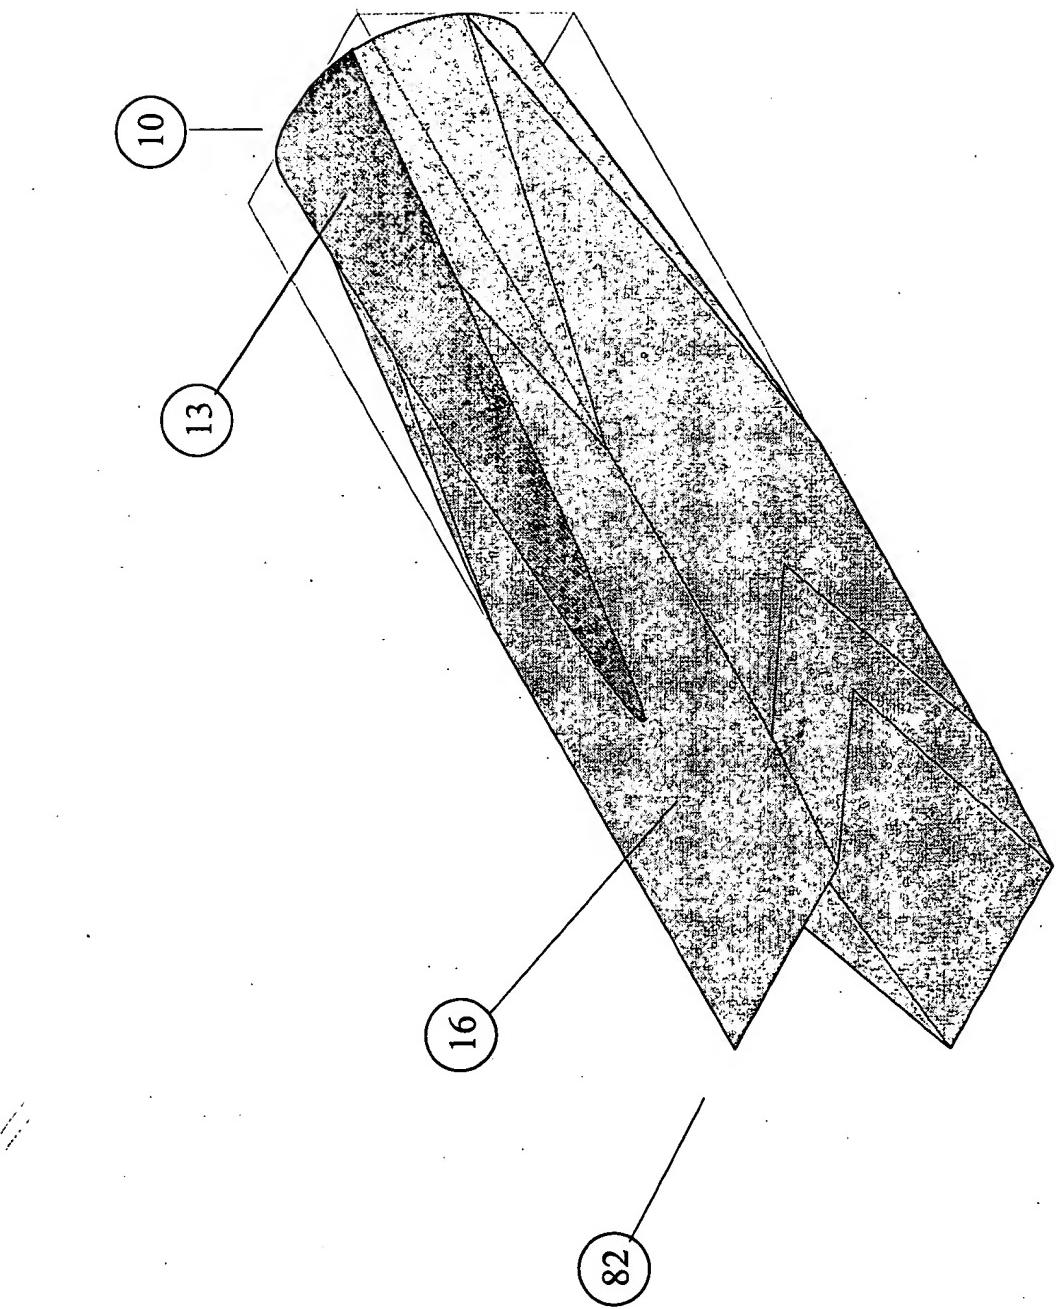


Figure 16

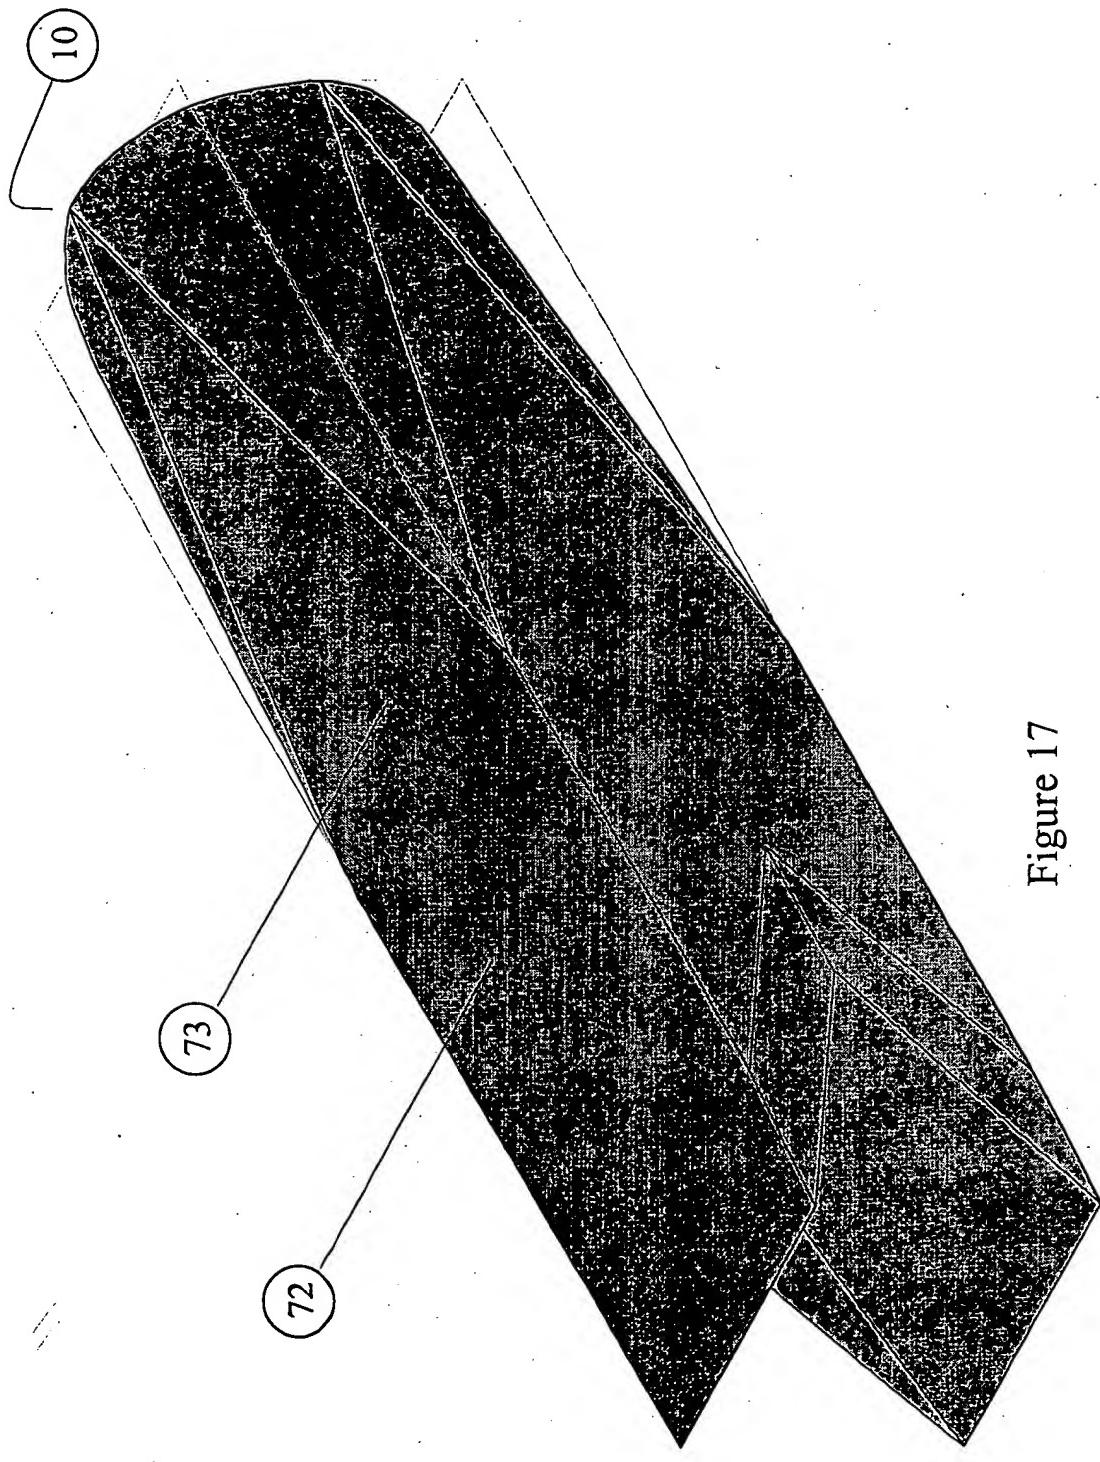


Figure 18

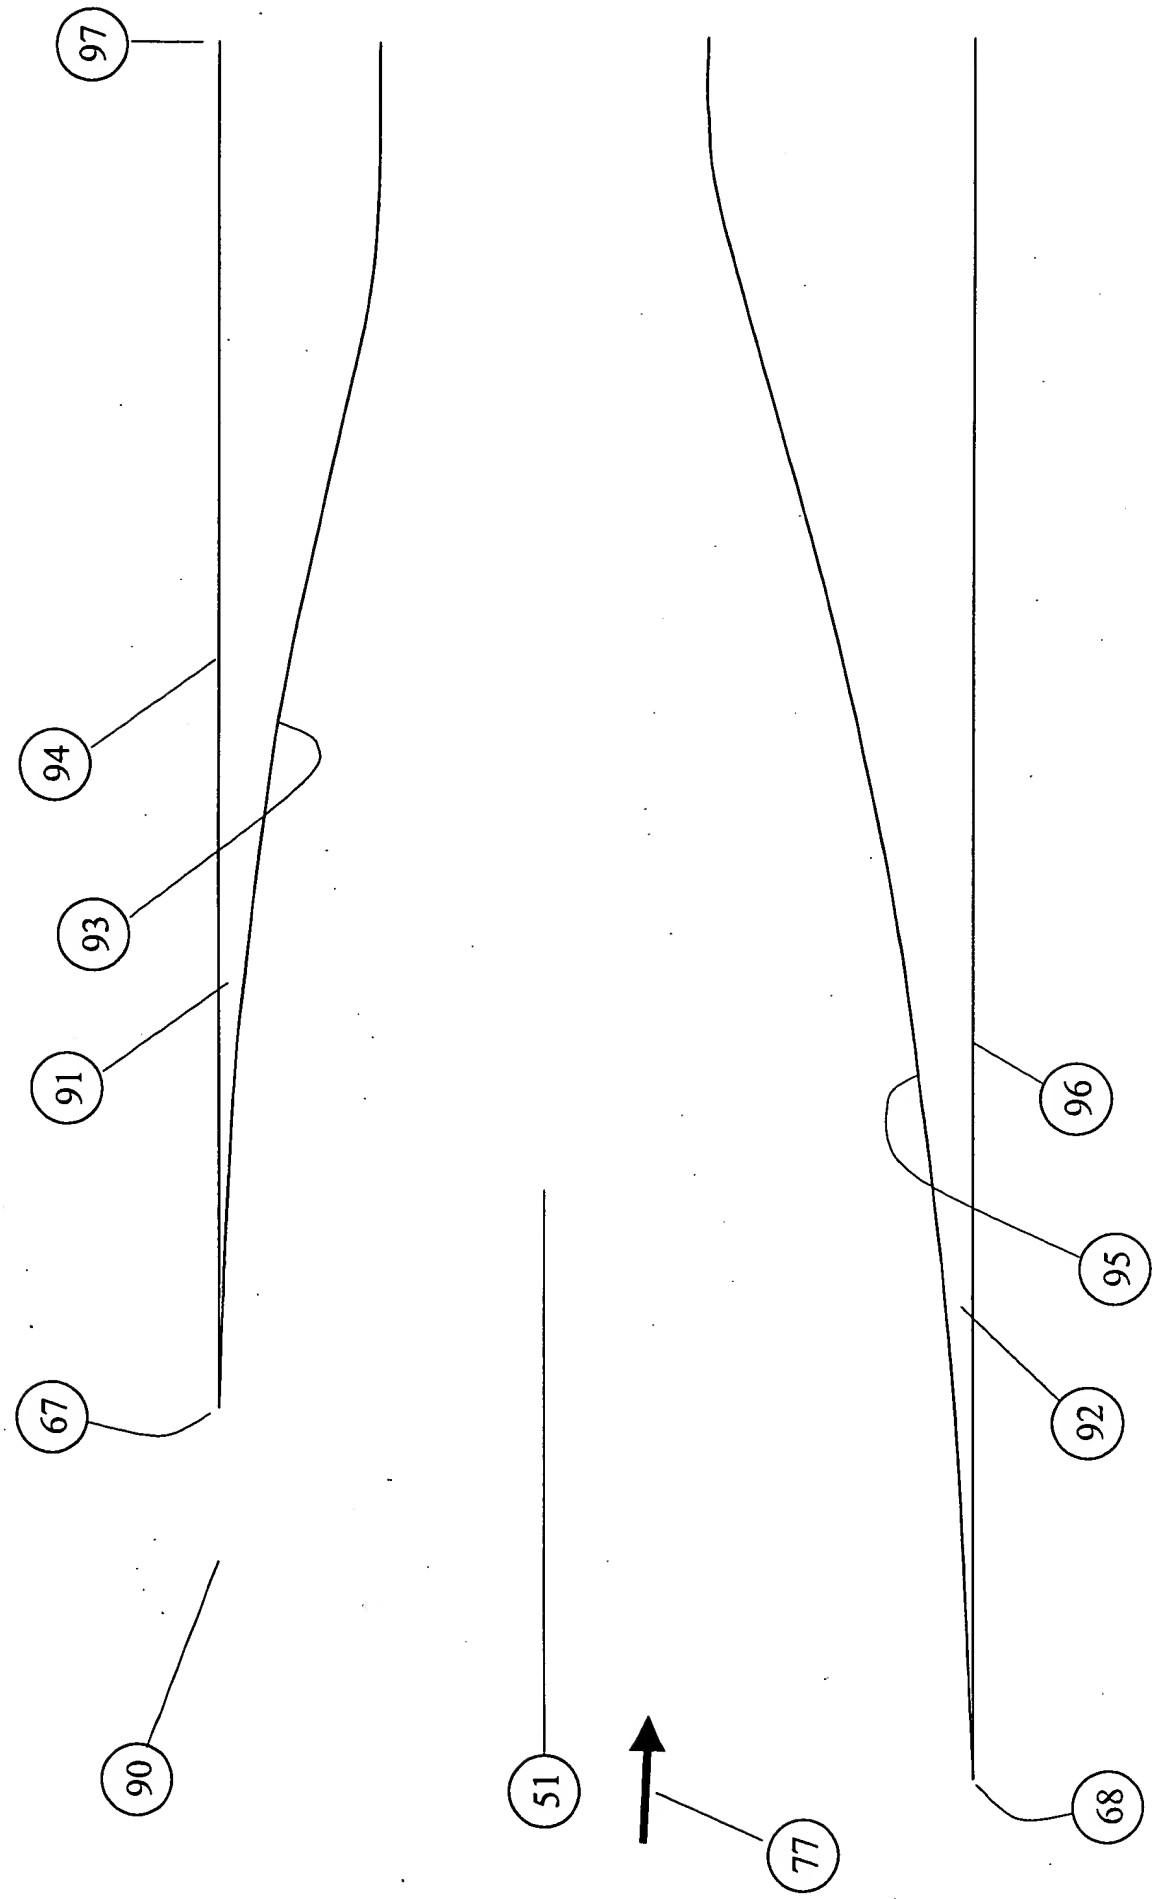


Figure 19

Figure 20

